

APN: 35138799
 Material: COPPER ALLOY SAE/USCAR-21 REVISION 4
 Surface: REFLOW TIN
 Material Thickness: 0.20 mm
 Cross Section [mm²]: 1.00

Strip Length: 4.20 mm
 Cable Type: FLRY-A

**Uncontrolled
Copy**
 For Information only!


Isolation Range Φ [mm]: 1.90-2.10
 Seal : 13582730

Cable type	Seal APN	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-A 1.00	13582730	19x0.26	2.00	120	1.10	+ 0.05 - 0.05	1.90	+ 0.10 - 0.10	3.70	+ 0.10 - 0.10	3.60	+ 0.10 - 0.10


Core:
 C-1.85-4.0-12
 APN 10713712

Isolation:
 IS-3.50-2.5-12
 APN 10713798

Anvil:
 Two piece anvil:
 AC-1.85-4.75
 APN 10806624
 AI-3.50-3.6-0.8
 APN 10807040

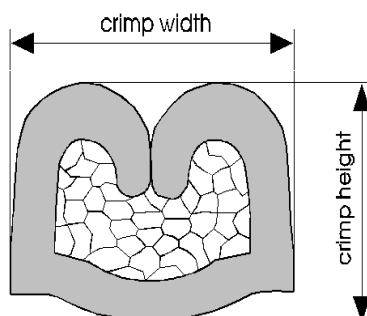

APN: 35138799

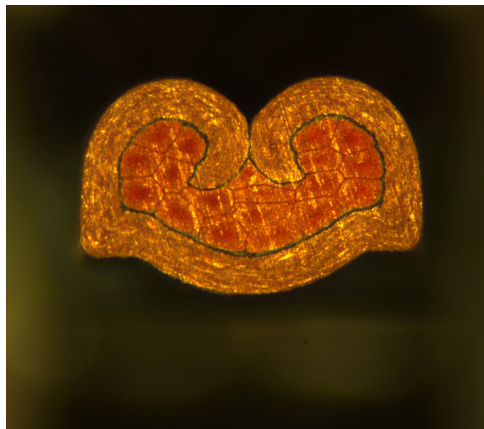

Cable:

FLRY-A 1.00mm² = 19x0.26 mm

Crimp height:

1.10 mm

Crimp width:

1.90 mm