



CODINGS RIGHT	CODINGS LEFT
CODING 4 RIGHT	CODING 4 LEFT
CODING 5 RIGHT	CODING 5 LEFT

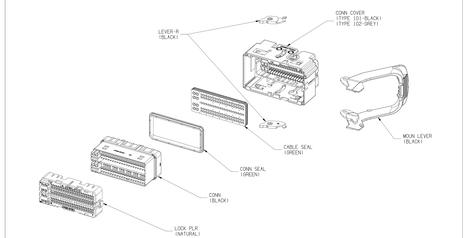





35656240 AS SHOWN








PLR SHOWN IN OPEN POSITION AND LEVER IN PRE-MATE CONDITION





NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:
   DIMENSIONS ARE TO FACE OF VIEW SHOWN AND
   TOLERANCES ARE PER ASME Y14.5M-2009 SPECIFICATION
   (SEE MATE MODEL FOR PRECISE DIMENSIONS). FOR ALL
   OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL
   BUILD, SEE MATE MODEL FOR PRECISE TOOL PATH DATA.
2. THIS PART ACCEPTS THE FOLLOWING COMPONENTS OR EQUIVALENT: SEE CHART
3. FOR APPLICATION DATA SEE THE INDIVIDUAL APPLICATION DRAWINGS.
4. REFERENCE CAVITY TERMINAL INFORMATION:

OCS 1.5	2503567	0.35-0.5	1.2-1.83
	2503569	0.75-1.0	1.7-2.34
	2503565	1.5-2.0	2.2-2.66
OCS 0.64	1393113	0.35-0.5	1.2-1.83
	1393112	0.75-0.8	1.7-1.9
TERMINAL	PART NO	CABLE SIZE (SQ.MM)	CABLE OD (MM)

5. REFERENCE MATING COMPONENTS OR EQUIVALENT:
   ASM CONN: 2503791 & 2503792 & 2504005 & 3551665
6. REFERENCE CAVITY PLUG OR EQUIVALENT:
   OCS 1.5: 2503567 & 2503569
   TERMINAL 0.64 : 2503837
7. REFERENCE MATING HEADER DRAWING:
   35340198-CUS01-S01, 35372030-CDE01-S02, 35372030-CDE01-S03 & 35372030-CDE01-S04.

| PART NO., | CAVITY | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 | 41 | 42 | 43 | 44 | 45 | 46 | 47 | 48 | 49 | 50 | 51 | 52 | 53 | 54 | 55 | 56 | 57 | 58 | 59 | 60 | 61 | 62 | 63 | 64 | 65 | 66 | 67 | 68 | 69 | 70 | 71 | 72 | 73 | 74 | 75 | 76 | 77 | 78 | 79 | 80 | 81 | 82 | 83 | 84 | 85 | 86 | 87 | 88 | 89 | 90 | 91 | 92 | 93 | 94 | 95 | 96 | 97 | 98 | 99 | 100 | (01) | (02) | (03) |
|---|---|---|---