


# OCS 1.5 SEALED SERIES

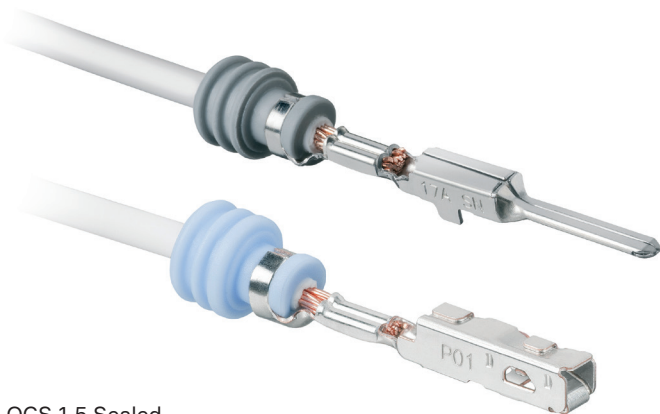

OCS 1.5 Sealed  
Female & Male Terminals

## BENEFITS

- Cavity compatible with industry standards and/or major OEM cavity preferences
- Wide range of crimp sizes with Aptiv proven crimp technology
- Meets or exceeds major OEM test protocols and requirements
- Contact tongue overstress and nose protection
- High performance copper alloy
- One-piece terminal construction

## FEATURES

- 6+ sigma projected reliability at 150,000 miles (241,401 km)
- Available in slippery tin plating to minimize terminal engage
- Up to 38% less material than the competition
- For use in 1.5 cable sealed applications




## AVAILABLE CONFIGURATIONS

Terminal Type	Box & Blade
Locking Mechanism	Tangless / Lanceless
Crimp Validated to	USCAR-21
Blade Size (mm)	1.5
Wire Gage Range (AWG)	21 - 15
Wire Gage Range (mm <sup>2</sup> )	0.35 - 1.5
Genders	Female, Male
Sealing Options	Cable Sealed
Plating Options	Sn, Ag

See back page for representative part numbers and packaging dimensions.




## TEMPERATURE



## VIBRATION



## MAX CURRENT



with 1.5 mm<sup>2</sup>



## CONTACT MATING FORCE



## About Aptiv

Aptiv is a global technology company that develops safer, greener and more connected solutions enabling a more sustainable future of mobility.

Visit [aptiv.com](https://aptiv.com)



Sealing	Gender	Plating	Wire size range (AWG)	Wire size range (mm <sup>2</sup> )	Part number	Other available platings	Other available configurations
Cable Sealed	F	Sn	15	1.25 - 1.5	35138798	Ag	N/A
Cable Sealed	F	Sn	17	0.75 - 1.0	35138799	Ag	N/A
Cable Sealed	F	Sn	21	0.35 - 0.50	35138800	Ag	N/A
Cable Sealed	F	Sn	21	0.35 - 0.50	35138801	Ag	N/A
Cable Sealed	M	Sn	17	0.75 - 1.0	13964786	Ag	N/A
Cable Sealed	M	Sn	21	0.35 - 0.50	13964785	Ag	N/A
Cable Sealed	M	Sn	21	0.35 - 0.50	13964784	Ag	N/A

Please, contact an Aptiv representative for the full part number list.

## COMPATIBLE SEALS


Type	Applicable Wire Size (mm <sup>2</sup> )	Color	Restraint Ring	Part Number
				
Cable Seal	0.35 - 0.75	Red	Yes	13834630
Cable Seal	0.75 - 1.5	Blue	Yes	13834623
Cable Seal	1.5 - 2.0	Gray	Yes	13834614
Cavity Plug	N/A	Red	Yes	33370412

## TEMP RISE CURVE

### OCS 1.5 Sealed Series Female Terminal

Aptiv taxi: 13887280  
 Cable range: 0.35 - 1.5 mm<sup>2</sup>  
 Crimp method: Standard  
 Contact plating: Sn  
 Test method: Single circuit in free air\*  
 Mated to: OCS 1.5 male terminals

\* For reference only

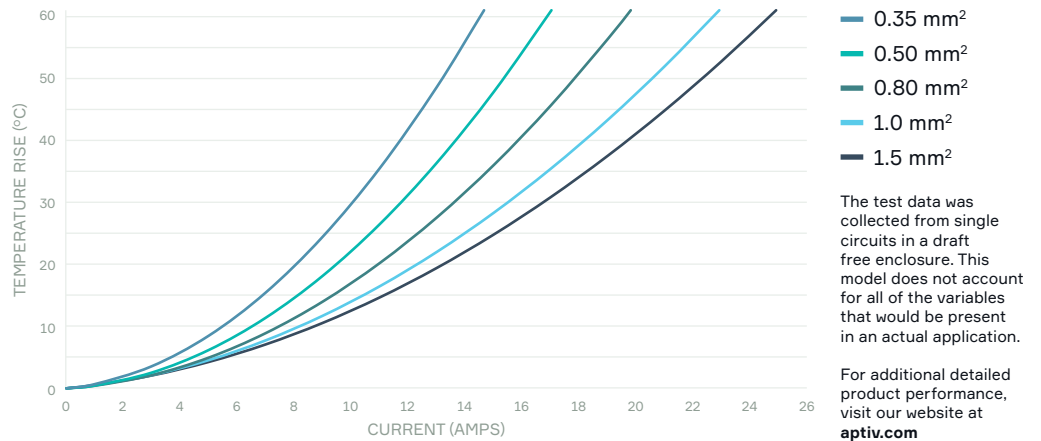

## COMPATIBLE WITH



Part numbers, specifications, dimensions and performance data in this document are for general references only and are subject to change without notice. To verify product information, please contact an Aptiv representative.

CS-SP87-OCS-En1123