

APN: 35350106
 Material: CuSn4
 Surface: Sn
 Material Thickness: 0,20 mm
 Cross Section [mm²]: 0.50 | 0.75

Strip Length: 4.00 mm
 Cable Type: FLRY-B

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.40-1.90
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.50		16x0.21	1.50	80	0.85	+ 0.05 - 0.05	1.60	+ 0.10 - 0.10	1.90	+ 0.10 - 0.10	1.80	+ 0.10 - 0.10
FLRY-B 0.75		24x0.21	1.80	120	0.95	+ 0.05 - 0.05	1.60	+ 0.10 - 0.10	2.10	+ 0.10 - 0.10	1.90	+ 0.10 - 0.10

Core:
 C-1.50-3.0-6
 APN 10713070


Isolation:
 IS-1.80-2.5-6
 APN 10713806

Anvil:

Two piece anvil:
 AC-1.50-3.25-A
 APN 10769934
 AI-1.80-3.2-0.2
 APN 10806811

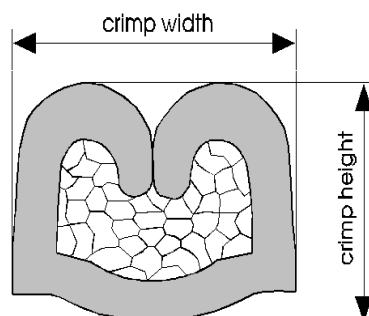


APN: 35350106

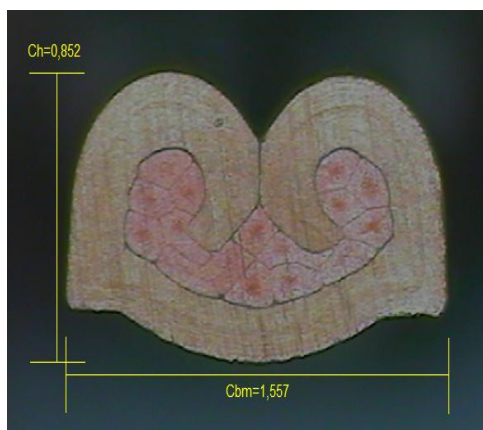

Cable:
FLRY-B 0.50mm² = 16x0.21 mm

Crimp height:
0.85 mm

Crimp width:
1.60 mm

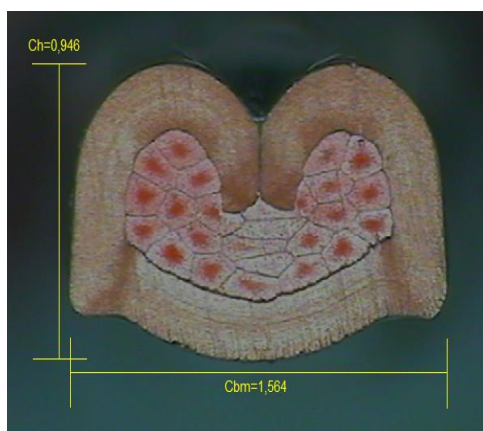

Cable:
FLRY-B 0.75mm² = 24x0.21 mm

Crimp height:
0.95 mm

Crimp width:
1.60 mm