


- 주 기 -
- 1. BEFORE USING, CHECK THE HARMFUL CRACK, BURR, ETC.
 - 2. GENERAL TOLERANCES - SEE BELOW
 - 3. MARKING & CAV No. BY AS GENERAL RULE OF KUM.
 - 4. APPLICATOR CONNECTOR : NWP(110 SEALED) SERIES CONN.
 - 5. APPLICATION WIRE.


1 6. APTIV Drawing No : 35351349

Insulation Nominal Diameter	KUM PART NAME	KUM P/No.	APTIV P/No.
Φ1.4 ~ 1.8	W/S NWP-1.4S(OR)	EM010-00100	35069181
Φ1.9 ~ 2.2	W/S NWP-1.9S(GN)	EM010-00030	35069182
Φ2.3 ~ 2.7	W/S NWP-2.3S(GY)	EM010-00120	35045206
Φ2.8 ~ 3.3	W/S NWP-2.8S(MB)	EM010-00140	35028845
Φ3.5 ~ 4.0	W/S NWP-3.6S(R)	EM010-00060	35297207
CLOSED SEAL	W/S NWP-V(BR)	EM010-00050	35069183


1 W/S NWP-1.4S(OR)

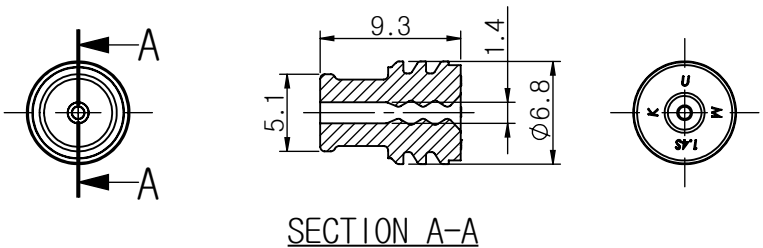


2 W/S NWP-1.9S(GN)

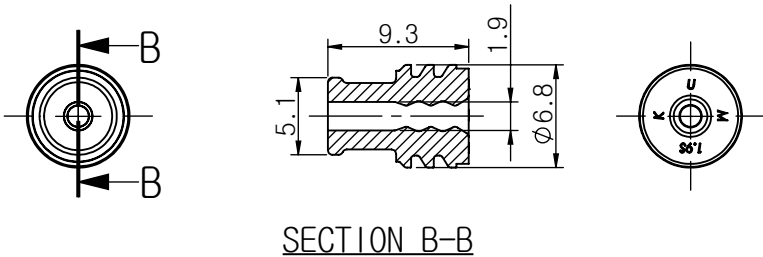


3 W/S NWP-2.3S(GY)

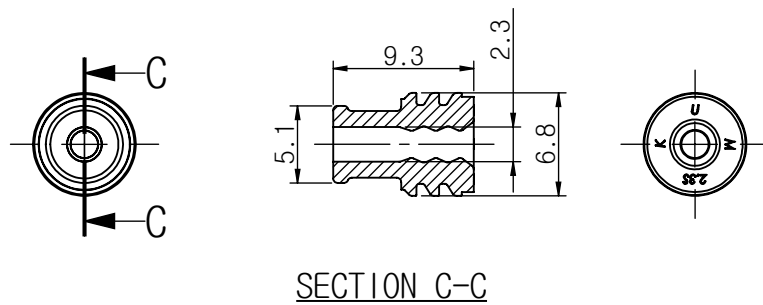


4 W/S NWP-2.8S(MB)

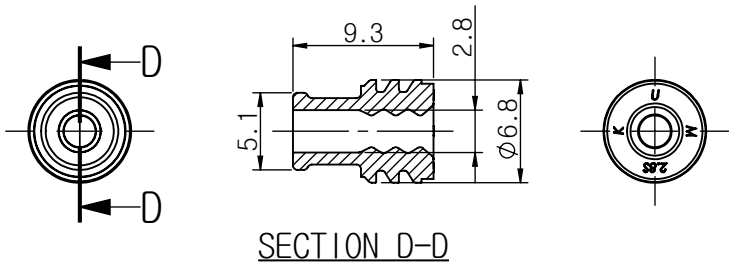

5 W/S NWP-3.6S(R)

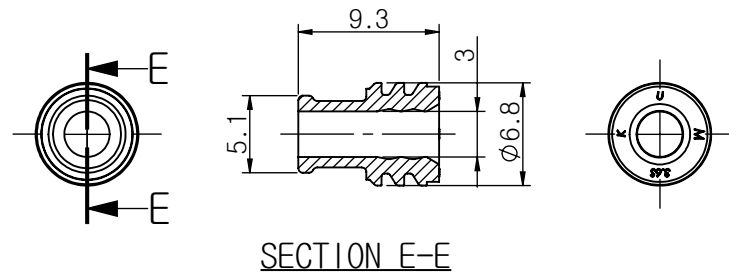

6 W/S NWP-V(BR)

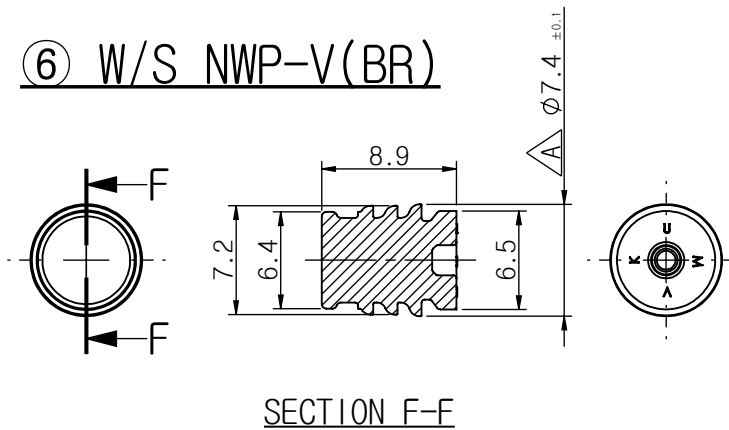

GENERAL TOLERANCE							
	10MAX	50MAX	100MAX	150MAX	200MAX	200VR	ANGLE
A	±0.2	±0.3	±0.5	±0.8	±1.0	±1.4	±30'

6	W/S NWP-V(BR)	EM010-00050	35069183	BROWN	SI RUBBER
5	W/S NWP-3.6S(R)	EM010-00060	35297207	RED	SI RUBBER
4	W/S NWP-2.8S(MB)	EM010-00140	35028845	MARINE BLUE	SI RUBBER
3	W/S NWP-2.3S(GY)	EM010-00120	35045206	GRAY	SI RUBBER
2	W/S NWP-1.9S(GN)	EM010-00030	35069182	GREEN	SI RUBBER
1	W/S NWP-1.4S(OR)	EM010-00100	35069181	ORANGE	SI RUBBER
No.	KUM PART NAME	KUM P/No.	APTIV P/No.	COLOR	MATERIAL
THIRD ANGLE PROJECTION	A	1/1(2/1)	PYI	PYI	KNJ
	TOLERANCE	SCALE	DESIGN	DRAWN	CHECKED

	19.08.02	-	△ 1	ADDED APTIV P/No.	KYB
CJW	16.11.09	-	△ C	전선 사양 수정 (1개소)	LDH
CJW	13.01.09	E013-0011	△ B	품번 오기 수정 (2개소)	PYI
CJW	12.04.30	E012-0077	△ A	공차 추가 (1개소)	PYI
CJW	10.12.28	E010-0243	△ -	신 규	PYI
승인	DATE	NOTE No.	SYM	ALTERATION	담당
DRAWING NAME			W/S NWP-1.4S(OR)		
DRAWING No.			EM010-00100-C01		
● APTIV ●					