
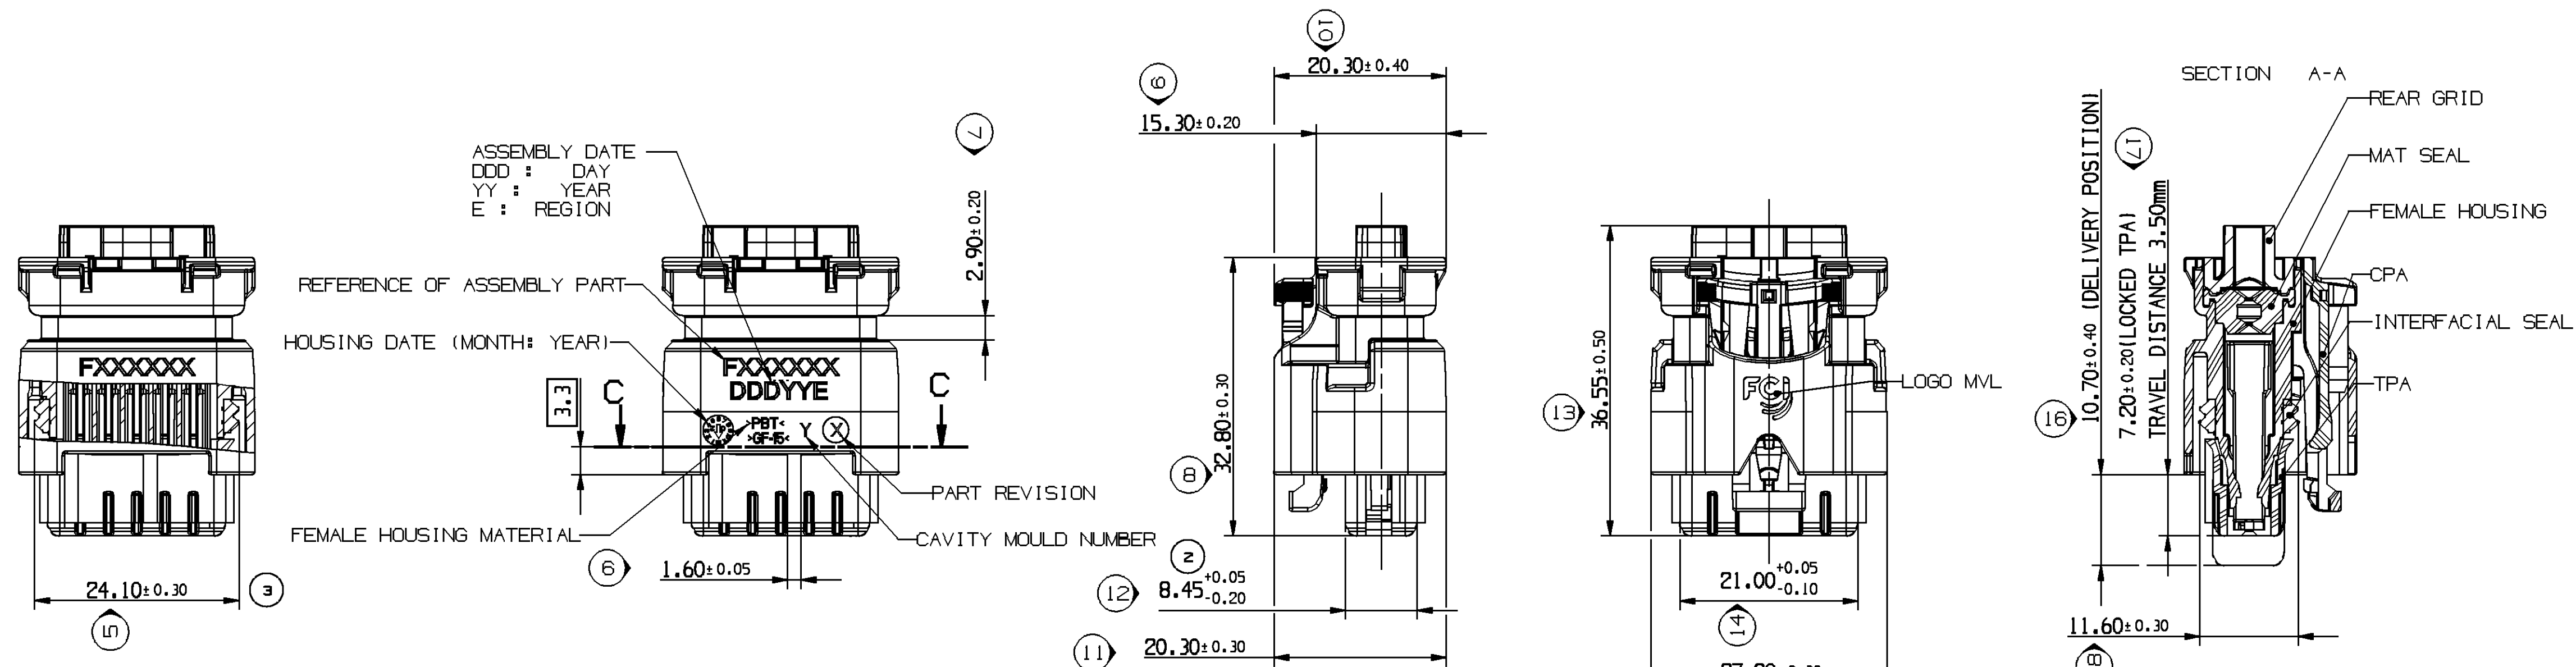


NOTE	SPECIFICATIONS
1	USER'S MANUAL MVL'S REFERENCE: FUIB4 - ASSOCIATED PRODUCTS (CONTACT, PLUS,...) ARE DEFINED IN THE USER'S MANUAL
2	WIRE INSULATION DIAMETER MIN: 1.18 MAX: 2.85
3	DELIVERED CONNECTOR WEIGHT : 12g
4	FEMALE/MALE CONNECTOR MATING FORCE F : 75 N
5	COMPATIBLE WITH INTERFACE DRAWING 211FT0289 Rev. C

REAR GRID	S483700	33512022	PBT GF 15%	BLACK
FEMALE HOUSING	S173700	33511995	PBT GF 15%	BLACK
TPA	S504700	33512002	PBT GF 15%	BLACK
	S404700	33512003		BLUE
	S304700	33512004		GREY
	S604700	33512005		RED
CPA	S704700	33512006	PBT GF 15%	PURPLE
	S683700	33512015		ORANGE
MAT SEAL	C493700	33503346	SILICONE HARDNESS 35±5 SHORE A	GREY
INTERFACIAL SEAL	C593700	33503349	SILICONE HARDNESS 50±5 SHORE A	BLUE
DESCRIPTION	MVL'S SERIAL REF.	DELPHI'S SERIAL REF. ②	MATERIAL	COLOUR

DWG STATUS				REVISION HISTORY				AUTH		DR		APVD	
DATE	STG	REV	N/P	CHG	ZONE							1	2
10JUN14	R	01	-	-		DRAWING NUMBER PCC08024B1 BECAME 13952561-0362				DGL	DGL	DGL	
03JUL14	R	02	-	-		KEYS OF UTILIZATION OF REAR GRID ARE SUPPRESSED NOTE ADDED FOR REAR GRID DELPHI REFERENCE ADDED IN THE TABLE DIMENSION 8.45+/-0.05 BECAME 8.45 +0.05/-0.2				NSK	SAJUP	LDIAZ	
01AUI14	R	03	-	-	E16	UPDATED DIMENSION NO.5 - 24.10+/-0.30 FOR INTERFACIAL SEAL ASSEMBLY				NSK	SAJUP	LDIAZ	

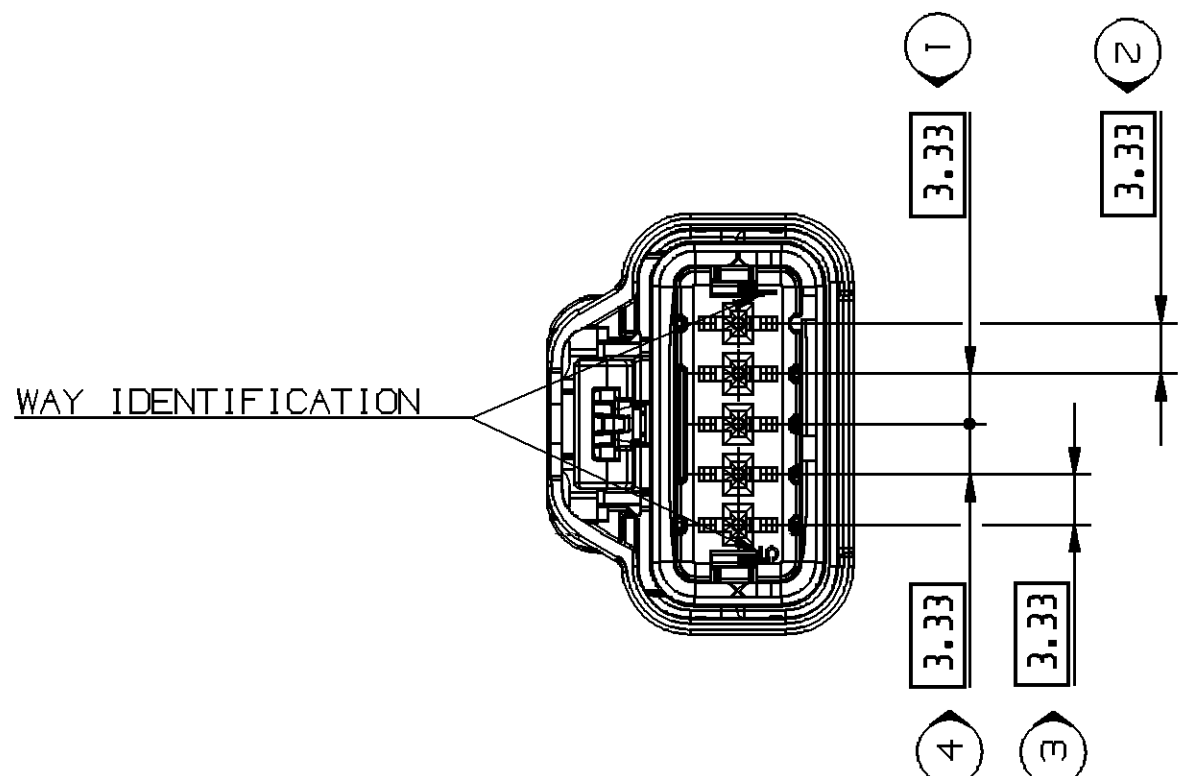

SECTION C-C

