CUSTOMER DRAWING

## ① W/S VWP-0.9S(R)

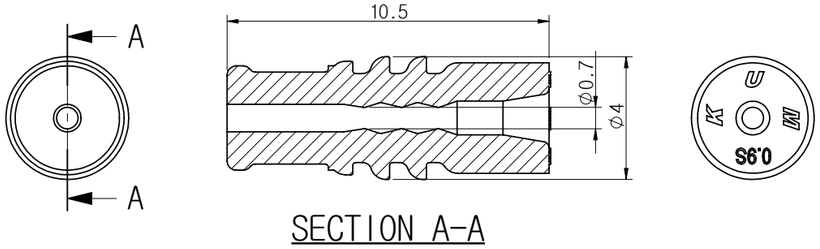


SECTION A-A

## ② W/S VWP-1.4S(LYG)

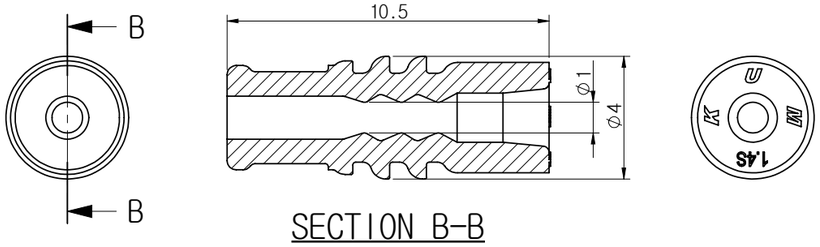


SECTION B-B

## ③ W/S VWP-1.9S(PU)

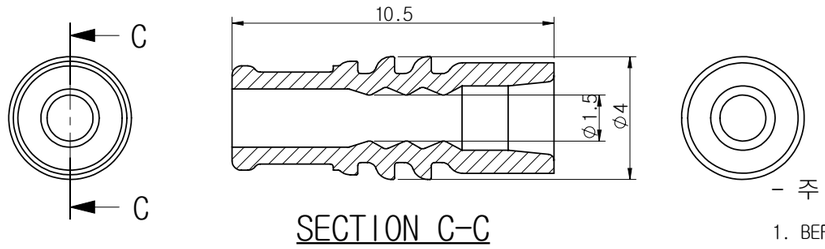


SECTION C-C

## ④ W/S VWP-V(MB)

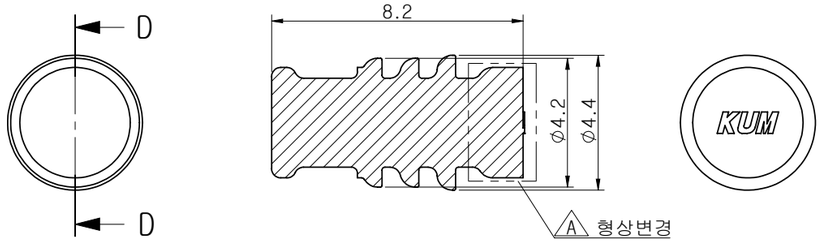


- 주 기 -

1. BEFORE USING, CHECK THE HARMFUL CRACK, BURR, ETC.
2. GENERAL TOLERANCE - SEE BELOW.
3. MARKING & CAV. No. BY AS GENERAL RULE OF KUM
4. APPLICABLE CONNECTOR : VWP(050 SEALED) SERIES.
5. APPLICABLE WIRE

| APPLICATION WIRE(SQ) | KUM PART NAME | KUM P/NO. | APTIV P/NO. △1 |
|---|---|---|---|
| CHFUS 0.13~0.22 | W/S VWP-0.9S(R) | EG020-00060 | 35297208 |
| AESSXF 0.3~0.85 | W/S VWP-1.4S(LYG) | EG020-00190 | 35297209 |
| AESSXF 1.25 | W/S VWP-1.9S(PU) | EG020-00090 | 35296482 |
| SEALED | W/S VWP-V(MB) | EG020-00140 | 35194249 |

△1 6. APTIV Drawing No : 35351344

| GENERAL TOLERANCE | | | | | | | |
|---|---|---|---|---|---|---|---|
| | 10MAX | 50MAX | 100MAX | 150MAX | 200MAX | 200VR | ANGLE |
| A | ±0.2 | ±0.3 | ±0.5 | ±0.8 | ±1.0 | ±1.4 | ±30' |

△1

| NO. | KUM PART NAME | KUM P/No. | APTIV P/No. | COLOR | MATERIAL |
|---|---|---|---|---|---|
| ④ | W/S VWP-V(MB) | EG020-00140 | 35194249 | MARIN BLUE | SI-RUBBER |
| ③ | W/S VWP-1.9S(PU) | EG020-00090 | 35296482 | PUPPLE | SI-RUBBER |
| ② | W/S VWP-1.4S(LYG) | EG020-00190 | 35297209 | LIGHT YELLOW GREEN | SI-RUBBER |
| ① | W/S VWP-0.9S(R) | EG020-00060 | 35297208 | RED | SI-RUBBER |

| THIRD ANGLE PROJECTION | A | 5/1 | LSJ | LSJ | KNJ | CJW |
|---|---|---|---|---|---|---|
| | TOLERANCE | SCALE | DESIGN | DRAWN | CHECKED | APPROVED |

| 승인 | DATE | NOTE No. | SYM | ALTERATION | 담당 |
|---|---|---|---|---|---|
| | 19.08.02 | - | △1 | ADDED APTIV P/No. | KYB |
| CJW | 17.11.16 | E017-0442 | △A | CHANGED SHAPE(1POINT) | KKJ |
| CJW | 11.07.21 | E011-0108 | △- | RELEASED | LSJ |

DRAWING NAME W/S VWP-1.9S(PU)

DRAWING No. EG020-00090-C01

APTIV