

APN: 35250567
 Material: CUNI3SI
 Surface: F.SN
 Material Thickness: 0.32 mm
 Cross Section [mm²]: 0.35 + 0.35 | 0.35 + 0.50 | 0.50 + 0.50 | 0.35 + 0.75

Strip Length: 4.00 mm
 Cable Type: FLRY-B +FLRY-B

**Uncontrolled
Copy**
For Information only!

Isolation Range Φ [mm]:
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.35 + FLRY-B 0.35		12x0.21 + 12x0.21	1.30 + 1.30	50	1.35	+ 0.05 - 0.05	2.00	+ 0.10 - 0.10	2.65	+ 0.10 - 0.10	2.65	+ 0.10 - 0.10
FLRY-B 0.35 + FLRY-B 0.50		12x0.21 + 16x0.21	1.30 + 1.50	50	1.40	+ 0.05 - 0.05	2.05	+ 0.10 - 0.10	2.80	+ 0.10 - 0.10	2.80	+ 0.10 - 0.10
FLRY-B 0.50 + FLRY-B 0.50		16x0.21 + 16x0.21	1.50 + 1.50	80	1.45	+ 0.05 - 0.05	2.10	+ 0.10 - 0.10	2.95	+ 0.10 - 0.10	2.85	+ 0.10 - 0.10
FLRY-B 0.35 + FLRY-B 0.75		12x0.21 + 24x0.21	1.30 + 1.80	50	1.50	+ 0.05 - 0.05	2.05	+ 0.10 - 0.10	3.00	+ 0.10 - 0.10	2.85	+ 0.10 - 0.10

Remarks: Handcrimptool available: DPN 10915982 / The tear-out force is validated for the small cable.

Core:
 C-1.85-3.0-15
 APN 10713544


Isolation:
 IO-2.50-2.5-10
 APN 10713870

Anvil: Two piece anvil:
 AC-1.85-3.25
 APN 10764127
 AI-2.50-2.6-0.2
 APN 10803513

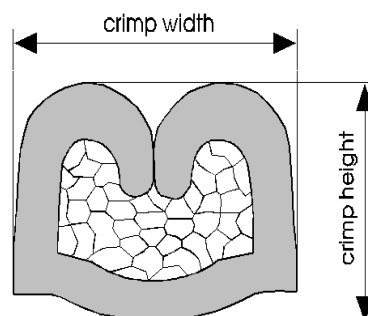

Notice to cable arrangement
 side: cables side by side
 top: one cable on top of the other
 n. d.: not defined

APN: 35250567

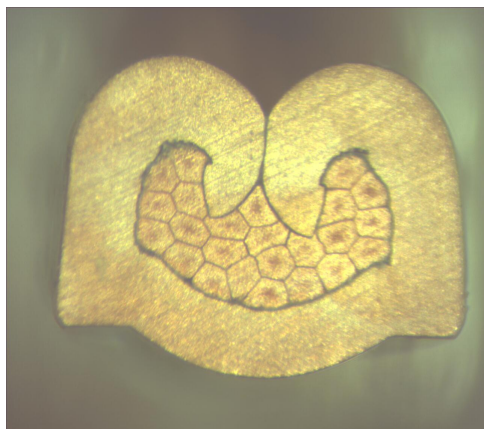

Cable:


FLRY-B 0.35mm² + FLRY-B 0.35mm² = 12x0.21 mm + 12x0.21 mm

Crimp height:

1.35 mm

Crimp width:

2.00 mm

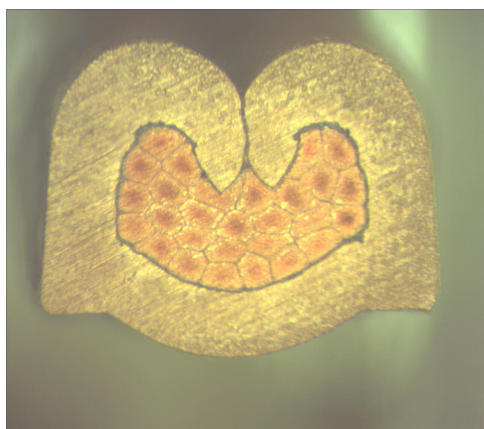

Cable:


FLRY-B 0.35mm² + FLRY-B 0.50mm² = 12x0.21 mm + 16x0.21 mm

Crimp height:

1.40 mm

Crimp width:

2.05 mm

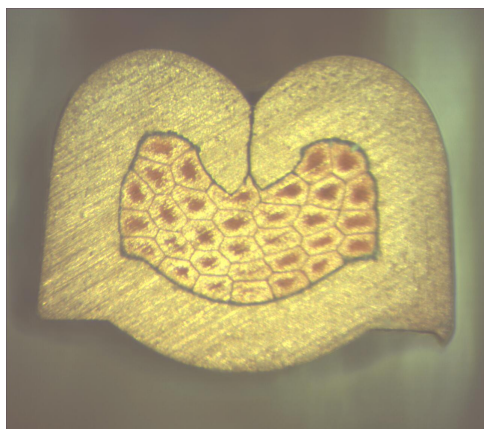

Cable:

FLRY-B 0.50mm² + FLRY-B 0.50mm² = 16x0.21 mm + 16x0.21 mm


Crimp height:

1.45 mm

Crimp width:

2.10 mm

APN: 35250567

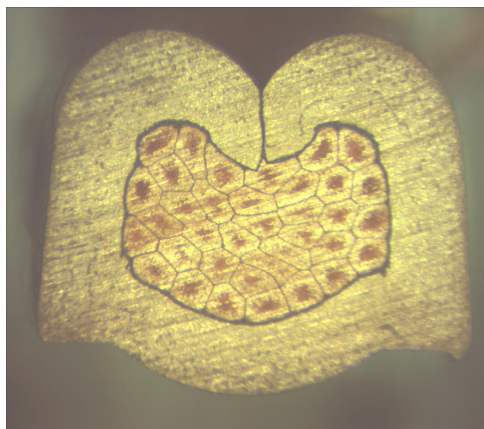

Cable:

FLRY-B 0.35mm² + FLRY-B 0.75mm² = 12x0.21 mm + 24x0.21 mm

Crimp height:

1.50 mm

Crimp width:

2.05 mm