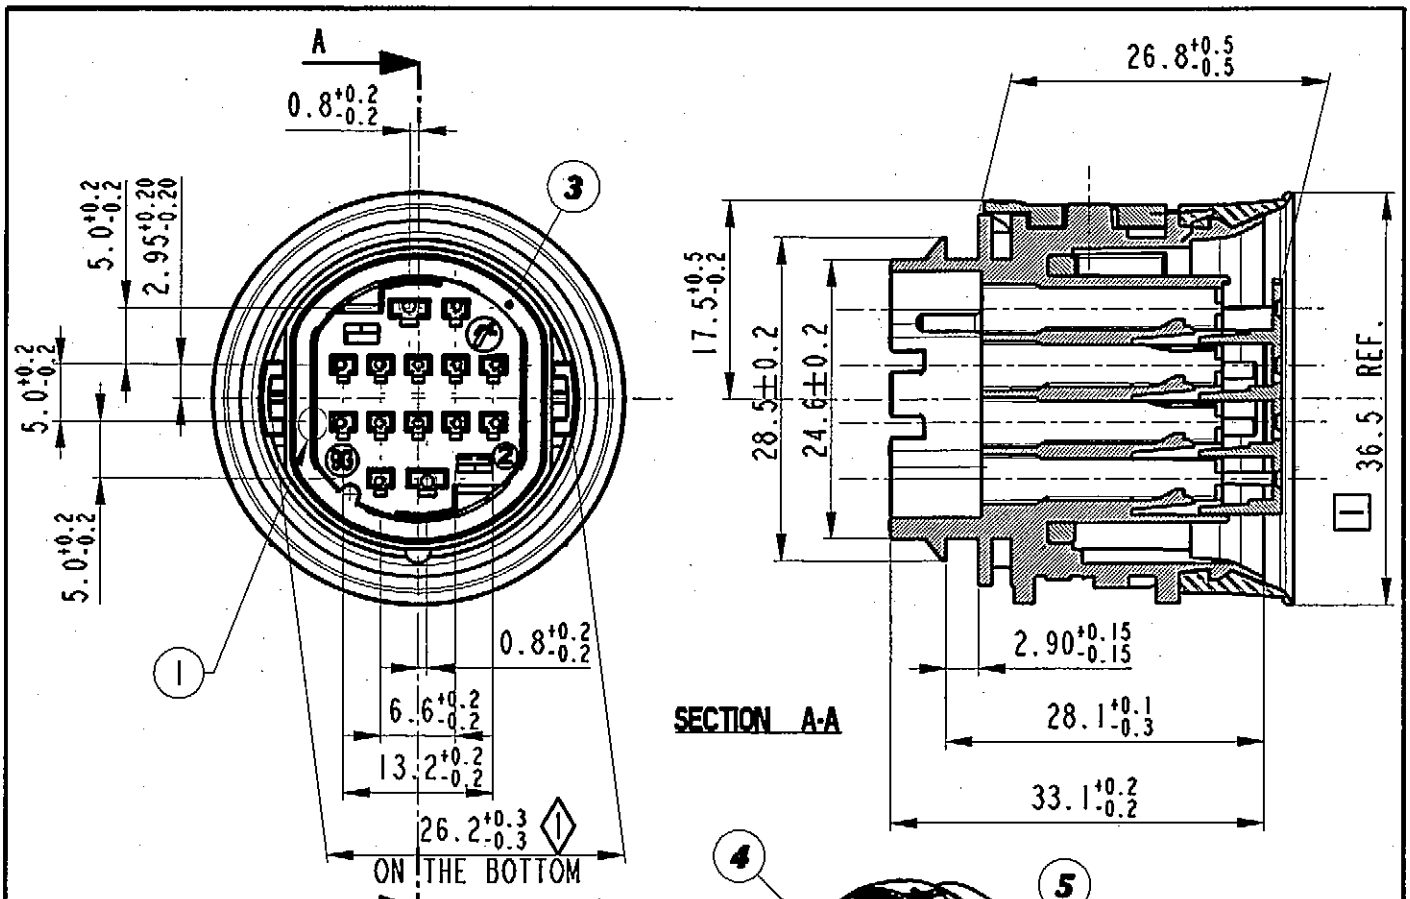

SCALE 2:1

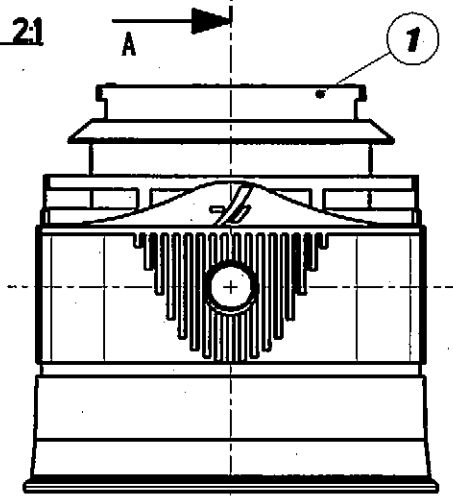

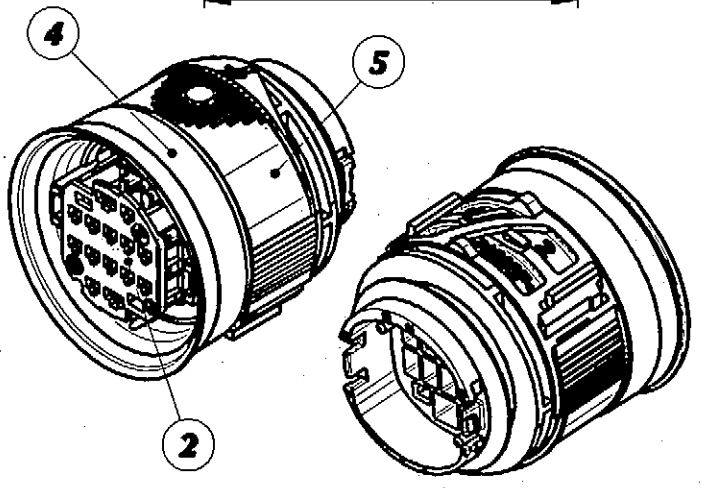

(1) PUNTO D'INIEZIONE: Ammesso mancante di stampaggio
Is admitted breakage of injection point

- *This connector is designed for the following female contacts:*

211 CC 2S 1120	-	211 CC 3S 1120
211 CC 2S 1150	-	211 CC 3S 2120
211 CC 2S 2150		
211 CC 2S 1160		
211 CC 2S 2160		

- *For use and mating operation : see spec. IPS 170*

[1] *External gasket maximum clearance after mating male and female holder.*

◇ CAPABILITY

SHEET 1 OF 2

FSA 309269

Description : DOOR TO BODY 14 WAYS ASSY FEMALE HOLDER

Cat. No : DTBFHPE14BK

Draft

Date 23/03/2004

We reserve the right to change dimensions or requirements without prior notice.

This is our exclusive property. It is not to be copied, reprinted or disclosed to a third party, nor used for manufacturing, without our written consent, and has to be returned to us in case of no usage.

European projection

Not to scale

All dimensions in mm

Tolerances ± ___ mm

Unless otherwise specified

FCI
FRAMATOME CONNECTORS INTERNATIONAL
Framatome connectors Italia S.p.A.

FSA 309269
customer drawing

Rev. 06

14 WAYS

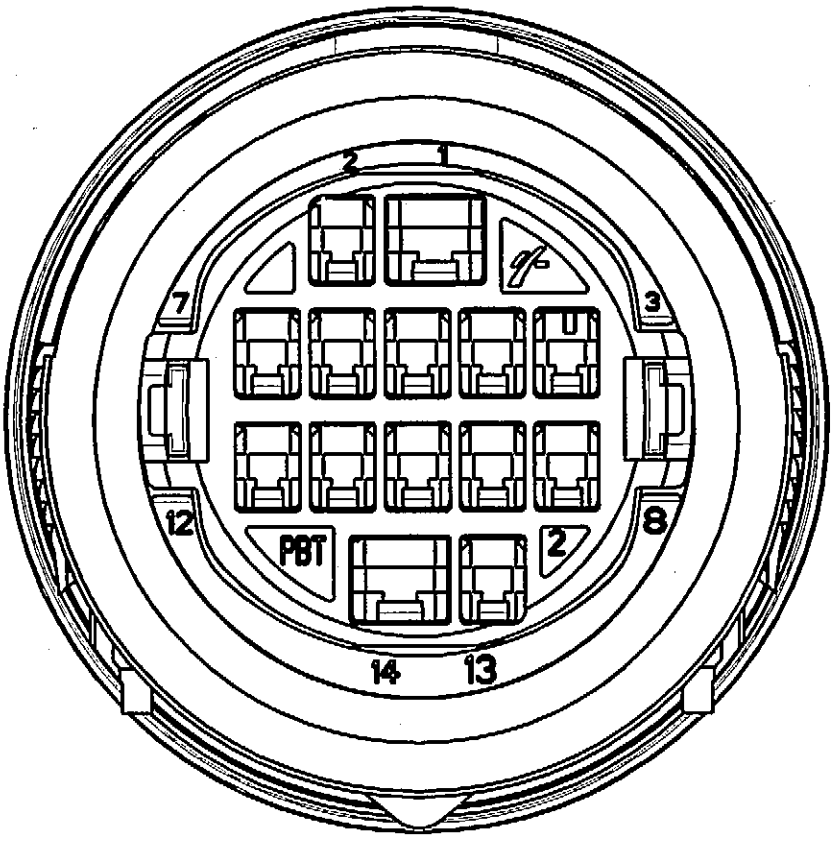

ITEM	COMPONENT DESCRIPTION	COLOUR	ASSY P/N
5	Slide	Gray	DTBFHPE14BK
4	External Gasket	Black	
3	Internal Gasket	Red	
2	Secondary Lock	Yellow	
1	14 Way Female Holder	Black	

SHEET 2 OF 2

FSA 309269

Description : DOOR TO BODY 14 WAYS ASSY FEMALE HOLDER

Cat. No : DTBFHPE14BK

Draft

Date 23/03/2004

We reserve the right to change dimensions or requirements without prior notice.

This is our exclusive property. It is not to be copied, reprinted or disclosed to a third party, nor used for manufacturing, without our written consent, and has to be returned to us in case of no usage.

European projection

Not to scale

All dimensions in mm

Tolerances ± ___ mm

Unless otherwise specified

FCI
FRAMATOME CONNECTORS INTERNATIONAL

Framatome connectors Italia S.p.A.

FSA 309269
customer drawing

Rev. 06