
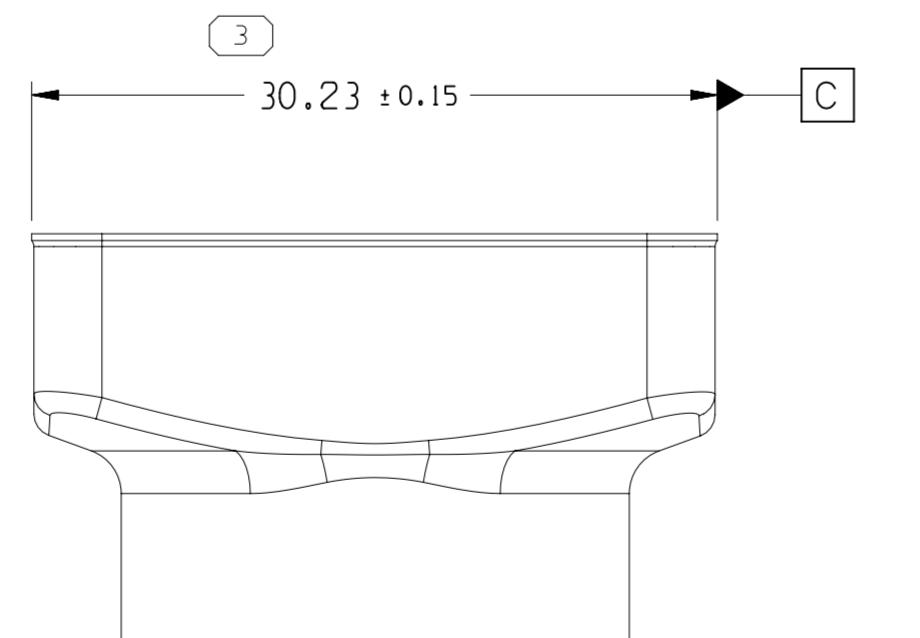
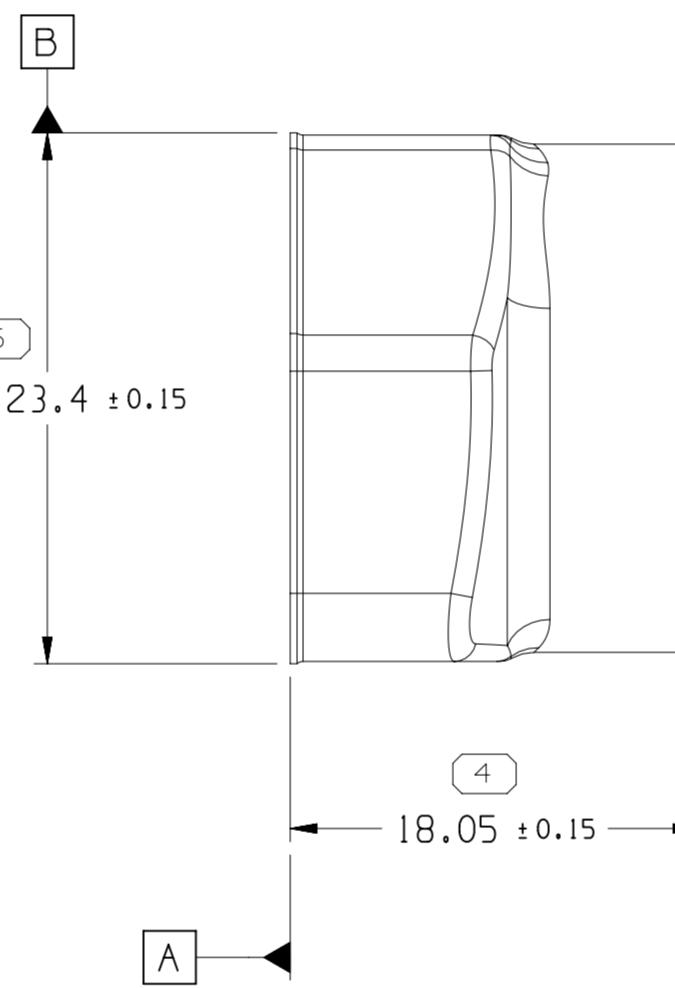
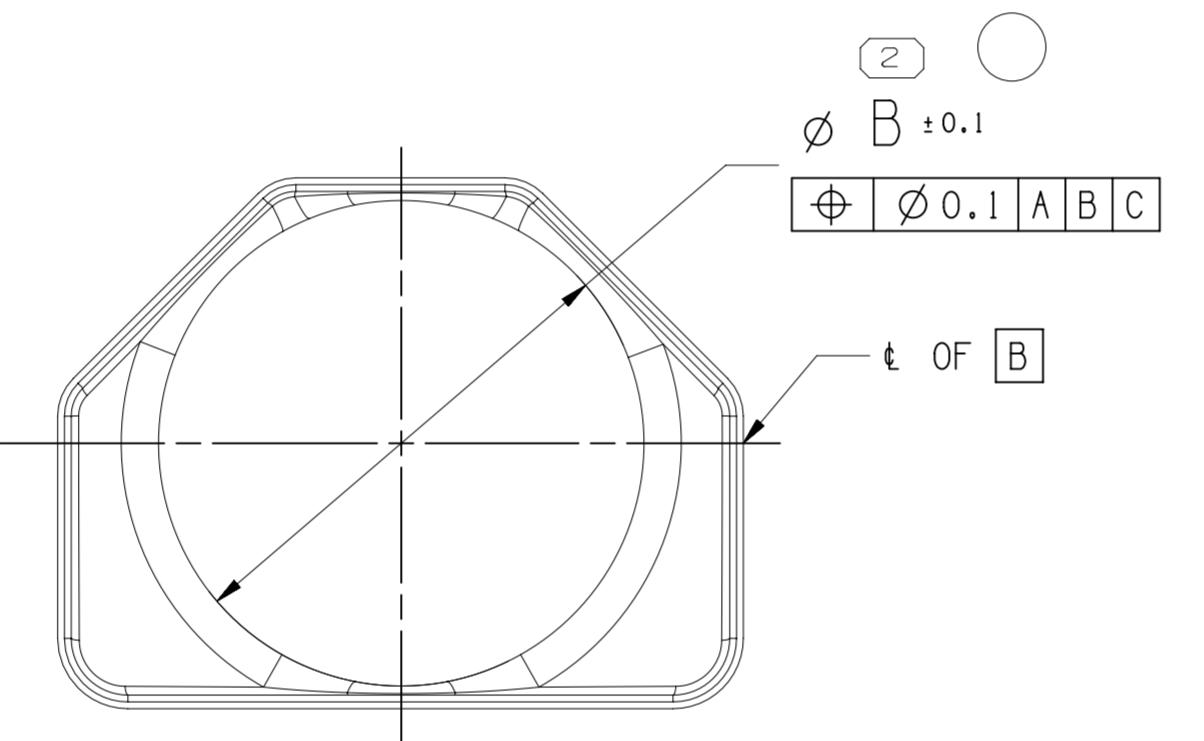
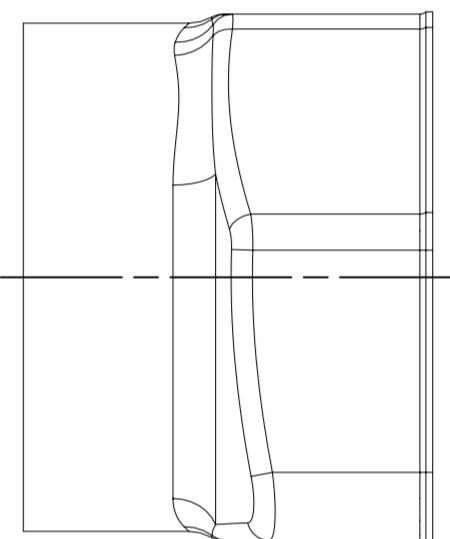
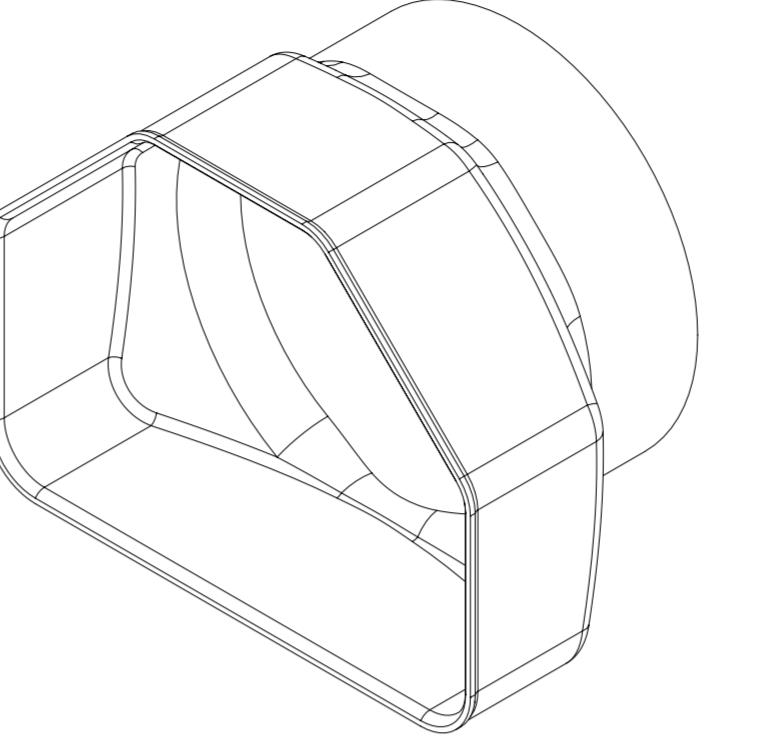


12	11	10	9	8	7	6	5	4	3	2	1					
SYMBOL DEFINITION																
MISSING SYMBOLS		DRAWING STATUS					ZONE	REVISION HISTORY				AUTH	DR	REV	1	2
		DATE	STG	REV	N/M	P/CHG		REVISION HISTORY								
H	A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL □ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON THE INDIVIDUAL COMPONENT DRAWING.	03FEB23	R	01	-	-	5	TOTAL NO OF MISSING SYMBOL NUMBER		RELEASED PART DRAWING	55793	SD	DL	TM		
		26APR23	R	02	-	-		35688729 - MATERIAL WAS COPPER; REVISED NOTES #4 & #5		56029	S	J	SNAD	H		
		25AUG23	R	03	-	-		35688729 - DIM #1 WAS Ø 12.4 AND DIM #2 WAS Ø 21.4 +/- 0.1		56125	S	J	SBES			
		16NOV23	R	04	-	-		35688729 - REVISED DIMS (2 PLCS); ADDED PART NUMBER 35688729-01; REVISED NOTES		56237	H	H	TM			
								35688729 - REVISED DIMS (2 PLCS); ADDED PART NUMBER 35688729-01; REVISED NOTES								

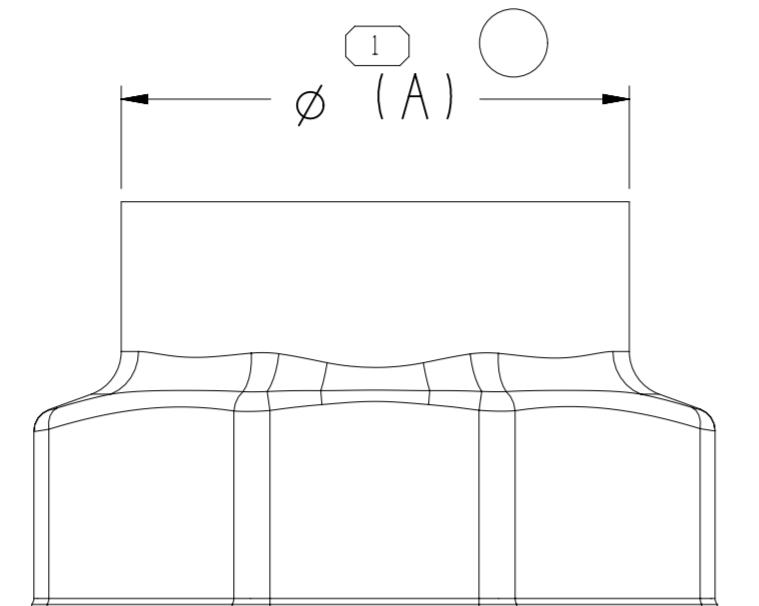

NOTES:

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED:

DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. THIS PART USED TYPICALLY IN ASSEMBLIES FOUND ON TAXI 35832523 AND 25832524.
3. PART MUST BE FREE OF BURRS, SHARP EDGES, OIL, GREASE OR OTHER CONTAMINANTS $\leq 0.05\text{mm}$ ALLOWABLE.
4. TIN PLATING THICKNESS OF $2\mu\text{m}$ (MICROMETERS) MINIMUM, 99.9% MATTE TIN PLATING PER ASTM B545.

DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION (SEE MATH MODEL FOR PRECISE DIMENSIONS). FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.

6 PART USED TYPICALLY IN ASSEMBLIES FOUND ON TAXI
32523 AND 25832524.

IT MUST BE FREE OF BURRS, SHARP EDGES, OIL, GREASE
OTHER CONTAMINANTS <0.05mm ALLOWABLE

PLATING THICKNESS OF $2\mu\text{m}$ (MICROMETERS) MINIMUM,
9% MATTE TIN PLATING PER ASTM B545.

35831208	01	-	LOW CARBON STEEL	21.4	20.4	70	ISO	
35688729	04	-	LOW CARBON STEEL	22.4	21.4	70	LV216	
PART NO	REV	N/P	MATERIAL SPECIFICATION AND COLOR		A	B	CABLE SIZE MM ²	CABLE TYPE

5	PROCESS SENSITIVE DIMENSION	ALL REF
DIMENSIONS ENCLOSED IN () INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED		
DIMENSIONAL RANGE (MM)		CHART D
FROM	0	> 12
TO	12	
TOLERANCE UNLESS OTHERWISE SPECIFIED		
	±0.1	±0.2
INCLUDES TOLERANCE		

<p>LINE DRAWN THROUGH A PART NUMBER INDICATES THAT PHYSICAL PARTS ARE NOT AVAILABLE FOR ORDERING.</p> <p>PART NUMBERS THAT DO NOT HAVE A LINE PRESENT INDICATE THAT PHYSICAL PARTS ARE AVAILABLE FOR ORDERING.</p> <p>CONTACT APTIV SALES TO ASSURE AVAILABILITY OF PARTS.</p>	
<p>WG TYPE</p> <p>PART DRAWING</p>	
ITLE	
OLUME (CM ³)	DISTR CODE
<p>UNLESS OTHERWISE SPECIFIED</p> <p>THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5-2009. SEE APTIV ENGINEERING DESIGN STANDARD B6 2017 FOR ISO 1101:2004 RECONCILIATION REQUIREMENTS.</p>	
<p>ALL DIMENSIONS ARE IN MILLIMETERS</p>	
<p>REFERENCE</p>	
THIRD ANGLE PROJECTION	<p>DO NOT SCALE</p> <p>USE MATH DATA</p> <p></p>

