


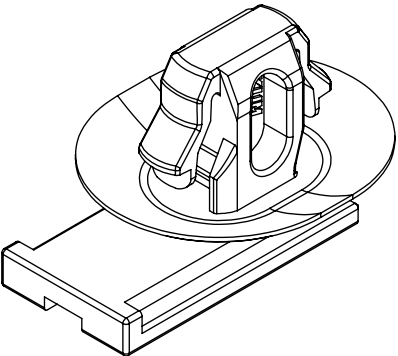
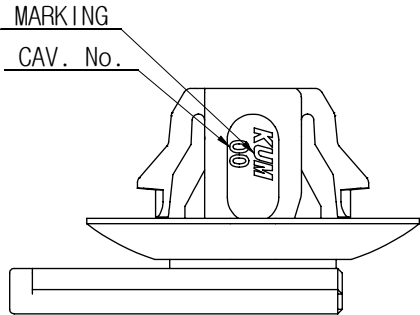
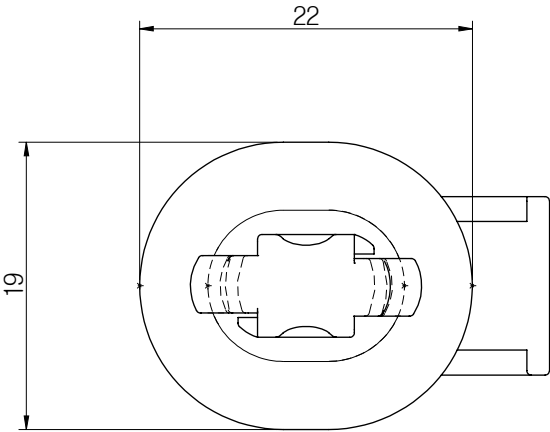
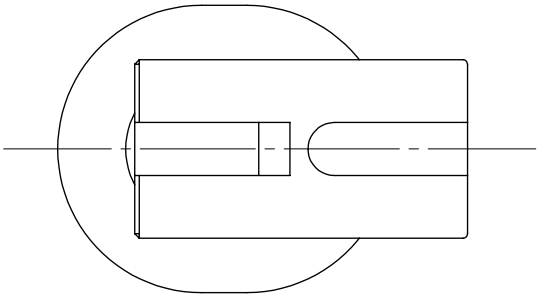




ISO VIEW

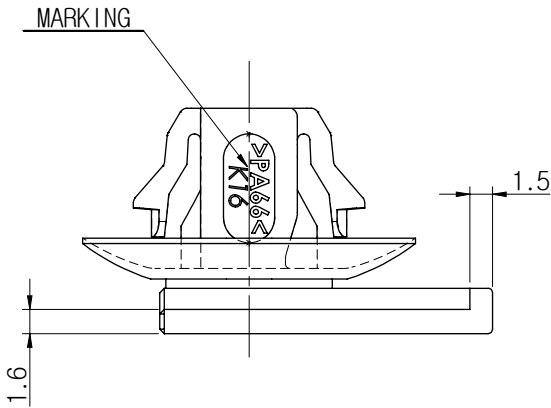


VIEW-Y

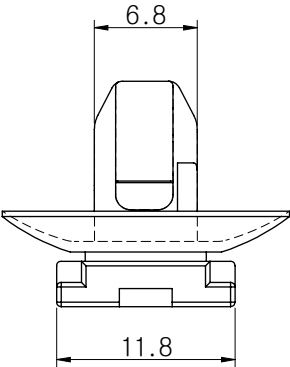

- 주 기 -

1. 사용상 유해한 흠, BURR등이 없을 것.
2. CAV. No. 및 MARKING은 당사규격에 준할 것.
3. 적용 PANEL 사양(t) : 2.1t ~ 3.0t
4. 지정된 PANEL HOLE에만 사용할 것.
- SLOT HOLE SIZE : 7mm X 12mm

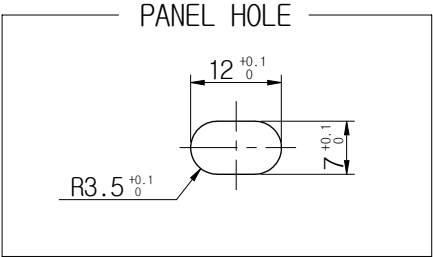

- △ 1 5. 적용 ASSY CONNECTOR : NMWP01MP[PB623-01720 / 35296902]
NMWP04M[PB621-04720 / 35296800]
- △ 1 6. APTIV Drawing No : 35299094

GENERAL TOLERANCE									
	10MAX	30MAX	50MAX	70MAX	100MAX	120MAX	250MAX	250VR	ANGLE
A	±0.15	±0.2	±0.3	±0.4	±0.5	±0.75	±0.9	±1.4	±30'

CLIP NMWP K16(B)			GC160-00020		35299094		BLACK		PA66			
KUM PART NAME			KUM P/No.		APTIV P/No.		COLOR		MATERIAL			
THIRD ANGLE PROJECTION	A		2/1(5/1)		LJW		LJW		KNJ		CJW	
	TOLERANCE		SCALE		DESIGN		DRAWN		CHECKED		APPROVED	

	17.05.10	-	△ ₁	ADDED APTIV No.	LJW
CJW	16.01.25	E016-0042	△ ₋	신 규	LJW
승인	DATE	NOTE No.	SYM	ALTERATION	담당
DRAWING NAME				CLIP NMWP K16(B)	
DRAWING No.				GC160-00020-C01	
● APTIV ●					