

# Crimp Information Sheet

Terminal Part Number: 13624983  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50 | 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1005  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,45 - 2,20  
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35		1,60	50	1,00	0,05	1,75	0,10	1,80	0,10	2,20	0,10
1005 0,50		1,74	75	1,05	0,05	1,70	0,10	1,90	0,10	2,30	0,10
1005 0,80		2,03	90	1,15	0,05	1,65	0,10	2,40	0,10	2,30	0,10

## Cable type code legend:

1005:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, PVDF, XLPE  
 Insul. Wall Designator: THIN

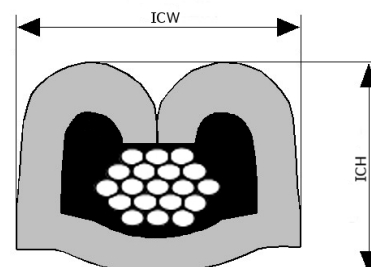

# Crimp Information Sheet

Terminal Part Number: 13624983  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,80

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 1007  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 2,20 - 2,45  
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 0,80		2,33	90	1,15	0,05	1,65	0,10	2,60	0,10	2,30	0,10

## Cable type code legend:

1007:

Industry Designator: SAE  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPA/PVDF, XLPE  
 Insul. Wall Designator: REGULAR

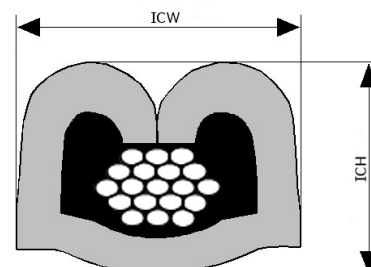

# Crimp Information Sheet

Terminal Part Number: 13624983  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*



Cable Type codes: 2010  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,20 - 1,70  
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35		1,34	50	0,95	0,05	1,70	0,10	1,60	0,10	2,20	0,10
2010 0,50		1,50	80	1,05	0,05	1,85	0,10	2,10	0,10	2,15	0,10

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC  
 Insul. Wall Designator: THIN

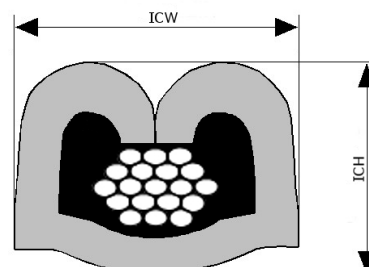

# Crimp Information Sheet

Terminal Part Number: 13624983  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,50



*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 2017  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,70  
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,50		1,50	75	1,00	0,05	1,65	0,10	1,90	0,10	2,20	0,10

## Cable type code legend:

2017: FLR41X-B, FLRY-A  
 Industry Designator: DIN  
 Conductor Material: COPPER  
 Conductor Plating: SN  
 Insul. Material: PA, PP, PVC, XLPE  
 Insul. Wall Designator: THIN

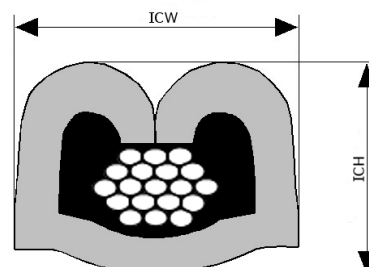

# Crimp Information Sheet

Terminal Part Number: 13624983  
 Surface Plating: SN  
 Material Thickness [mm]: 0,25  
 Cross Section [mm<sup>2</sup>]: 0,30 | 0,50

*This document is non-contractual  
 and for information only.  
 For more information, please  
 consult your local sales office*

Cable Type codes: 3004  
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
 Insulation Range  $\Phi$ [mm]: 1,30 - 1,70  
 Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30		1,40	50	0,90	0,05	1,65	0,10	1,80	0,10	2,20	0,10
3004 0,50		1,60	75	0,95	0,05	1,70	0,10	1,90	0,10	2,30	0,10

## Cable type code legend:

3004: AVSS  
 Industry Designator: JIS/JA  
 Conductor Material: COPPER  
 Conductor Plating: NONE  
 Insul. Material: PVC, XLPE, X-PVC  
 Insul. Wall Designator: THIN

