

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,80

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 2,20
Seal(s): 15327918 | 15339560

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50 / 15339560		1,74	75	1,05	0,05	1,90	0,10	3,10	0,10	3,40	0,10
1005 0,80 / 15327918		2,03	90	1,15	0,05	1,90	0,10	3,00	0,10	3,40	0,10
1005 0,80 / 15339560		2,03	90	1,15	0,05	1,90	0,10	3,20	0,10	3,40	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

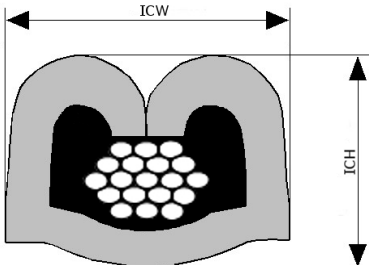

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,90 - 1,02
Seal(s): 15344938

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,50 / 15344938		0,96	75	1,05	0,05	1,90	0,10	3,20	0,10	3,40	0,10

Cable type code legend:

1021:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

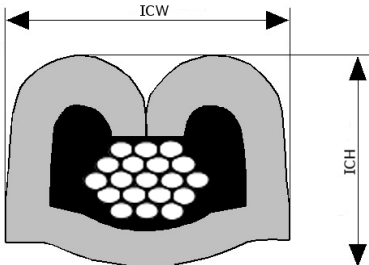

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1025
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,85
Seal(s): 15344938

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,50 / 15344938		1,73	75	1,05	0,05	1,90	0,10	3,00	0,10	3,30	0,10

Cable type code legend:

1025:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE
Insul. Wall Designator: THIN

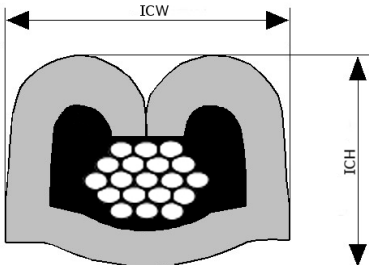

Crimp Information Sheet

DELPHI

Terminal Part Number: 15482324

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50 | 0,75

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 1,30 - 1,90

Seal(s): 15344938 | 15339560

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,50 / 15344938		1,50	80	1,10	0,05	1,90	0,10	3,20	0,10	3,15	0,10
2010 0,75 / 15339560		1,75	120	1,20	0,05	1,90	0,10	3,20	0,10	3,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

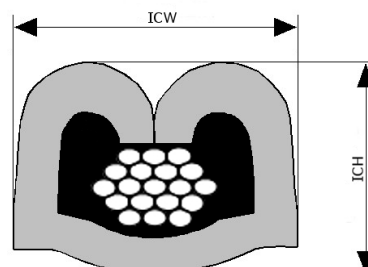

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,75

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2011
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,50
Seal(s): 10720807 | 15339560

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2011 0,50 / 10720807		2,15	75	1,05	0,05	1,90	0,10	3,20	0,10	3,40	0,10
2011 0,50 / 15339560		2,15	75	1,05	0,05	1,90	0,10	2,90	0,10	3,20	0,10
2011 0,75 / 10720807		2,28	85	1,15	0,05	1,90	0,10	3,40	0,10	3,40	0,10

Cable type code legend:

2011: FL33X, FLK, FLY, FLYKW, IH WIRE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: P/EST, PE, PVC, XLPE
Insul. Wall Designator: REGULAR

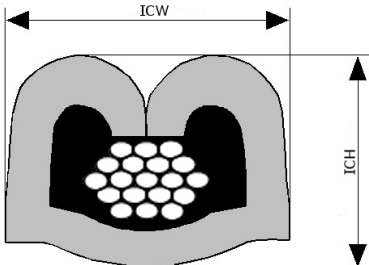

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,75

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2017
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,30 - 1,90
Seal(s): 15339560 | 15344938

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,50 / 15344938		1,50	80	1,10	0,05	1,90	0,10	3,20	0,10	3,15	0,10
2017 0,75 / 15339560		1,75	120	1,20	0,05	1,90	0,10	3,20	0,10	3,15	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: PA, PP, PVC, XLPE
Insul. Wall Designator: THIN

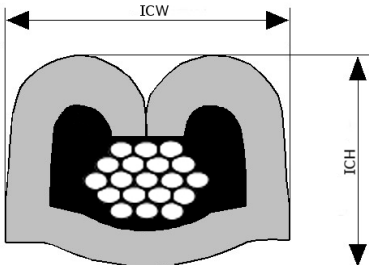

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50 | 0,75

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2019
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,30 - 1,90
Seal(s): 15344938 | 15339560

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2019 0,50 / 15344938		1,50	80	1,10	0,05	1,90	0,10	2,80	0,10	3,05	0,10
2019 0,75 / 15339560		1,70	120	1,20	0,05	1,90	0,10	2,90	0,10	3,10	0,10

Cable type code legend:

2019: FL7Y 179, FLR7Y, FLR7Y-A, FLR7Y-B, FLU7Y
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: ETFE
Insul. Wall Designator: THIN

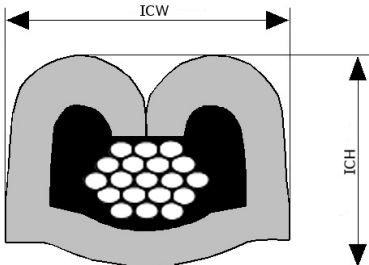

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,75

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2051
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,50 - 1,60
Seal(s): 15344938

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2051 0,75 / 15344938		1,55	120	1,20	0,05	1,90	0,10	3,00	0,10	3,15	0,10

Cable type code legend:

2051: FLU7Y-A
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: ETFE
Insul. Wall Designator: ULTRA THIN

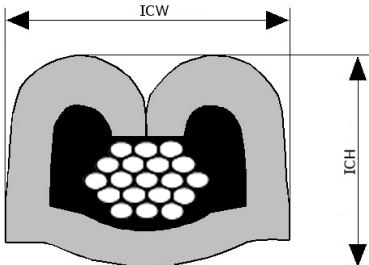

Terminal Part Number: 15482324
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,85

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,70 - 1,90
Seal(s): 15327918 | 15339560

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 0,85 / 15327918		1,80	95	1,15	0,05	1,95	0,10	3,20	0,10	3,40	0,10
3003 0,85 / 15339560		1,80	95	1,15	0,05	1,95	0,10	3,20	0,10	3,40	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN

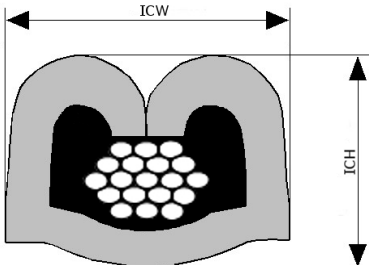

Terminal Part Number: 15482324

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 3004

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,50 - 1,70

Seal(s): 15339560 | 15327918

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,50 / 15339560		1,60	75	1,05	0,05	1,90	0,10	2,90	0,10	3,30	0,10
3004 0,50 / 15327918		1,60	75	1,05	0,05	1,90	0,10	2,90	0,10	3,30	0,10

Cable type code legend:

3004: AVSS



Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE, X-PVC

Insul. Wall Designator: THIN

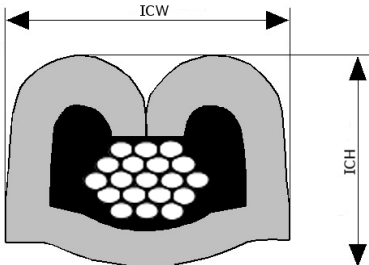

Terminal Part Number: 15482324

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 3006

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 0,90 - 1,00

Seal(s): 15327918

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3006 0,50 / 15327918		0,95	75	1,05	0,05	1,90	0,10	2,90	0,10	3,30	0,10

Cable type code legend:

3006:

Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: NONE

Insul. Wall Designator: NONE

