

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,45 - 1,88

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35		1,60	55	0,90	0,05	1,50	0,10	1,70	0,10	1,80	0,10
1005 0,50		1,74	80	1,00	0,05	1,50	0,10	1,90	0,10	1,90	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

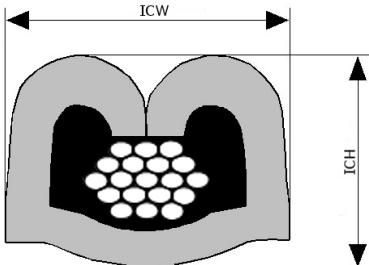

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1021

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 0,90 - 1,02

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,50		0,96	80	1,00	0,05	1,50	0,10	1,90	0,10	1,90	0,10

Cable type code legend:

1021:


Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: NONE

Insul. Wall Designator: NONE



Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 1025

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,47 - 1,85

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1025 0,35		1,55	55	0,90	0,05	1,50	0,10	1,70	0,10	1,80	0,10
1025 0,50		1,73	80	1,00	0,05	1,50	0,10	1,90	0,10	1,90	0,10

Cable type code legend:

1025:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: FLUORPOLYM, HDPE, PBT, PE, PVC, XLPE

Insul. Wall Designator: THIN

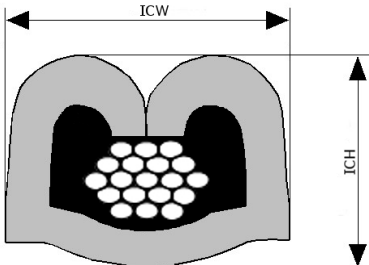

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1047
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,40 - 1,75
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1047 0,35		1,58	70	0,90	0,05	1,50	0,10	1,70	0,10	1,80	0,10

Cable type code legend:

1047:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: THIN

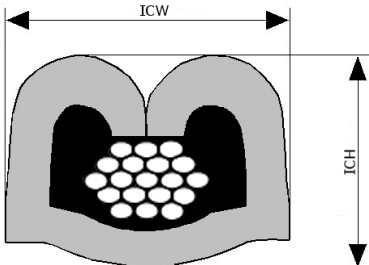

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1064
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,85
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1064 0,50		1,73	75	1,00	0,05	1,50	0,10	1,90	0,10	1,90	0,10

Cable type code legend:

1064:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM
Insul. Wall Designator: THIN

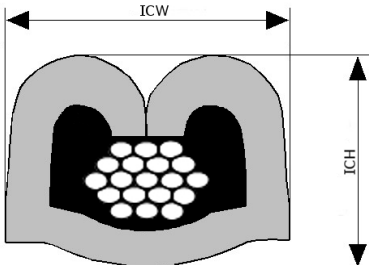

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1070
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,60 - 1,85
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1070 0,50		1,73	75	1,00	0,05	1,50	0,10	2,00	0,10	1,90	0,10

Cable type code legend:

1070:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: FLUORPOLYM
Insul. Wall Designator: THIN

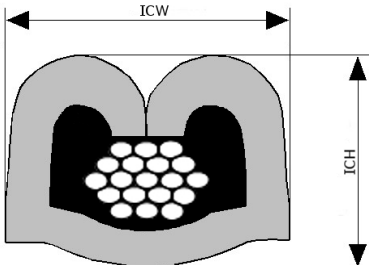

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1107
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,64 - 1,80
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1107 0,50		1,72	80	1,00	0,05	1,50	0,10	1,90	0,10	1,90	0,10

Cable type code legend:

1107:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: FLUORPOLYM
Insul. Wall Designator: THIN

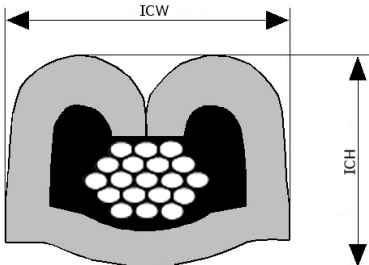

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,20 - 1,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35		1,34	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2010 0,50		1,50	80	1,05	0,05	1,45	0,10	1,70	0,10	1,90	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

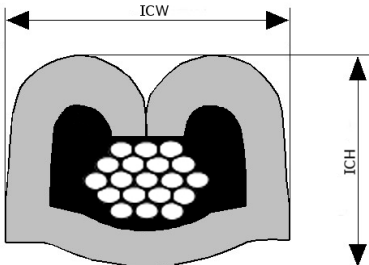

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2016

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 0,75 - 1,00

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,50		0,88	75	1,05	0,05	1,50	0,10	1,80	0,10	1,90	0,10

Cable type code legend:

2016: DIN-CORE



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: NONE

Insul. Wall Designator: NONE

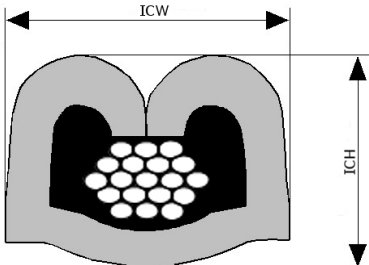

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,10 - 1,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35		1,25	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2017 0,50		1,50	80	1,05	0,05	1,45	0,10	1,70	0,10	1,90	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PP, PVC, XLPE

Insul. Wall Designator: THIN

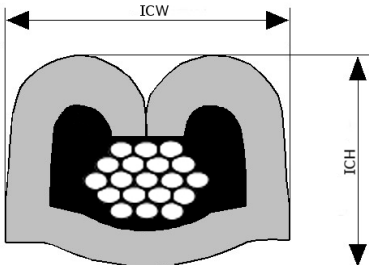

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2044
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,25 - 1,60
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2044 0,35		1,33	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2044 0,50		1,50	75	1,05	0,05	1,50	0,10	1,80	0,10	1,90	0,10

Cable type code legend:

2044: A3Z, F3Z, FL RENAULT A3Z
Industry Designator: NRA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPA/PVDF, XLPE, X-POLY ZH
Insul. Wall Designator: THIN

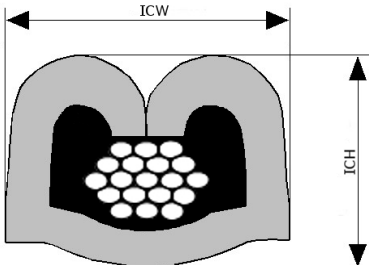

Terminal Part Number: 15426816

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,30 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 3004

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 1,30 - 1,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 0,30		1,40	50	0,95	0,05	1,45	0,10	1,70	0,10	1,80	0,10
3004 0,50		1,60	75	1,05	0,05	1,50	0,10	1,80	0,10	1,90	0,10

Cable type code legend:

3004: AVSS



Industry Designator: JIS/JA

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPE, X-PVC

Insul. Wall Designator: THIN

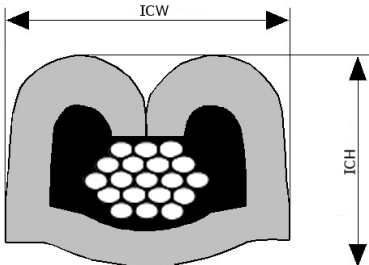

Terminal Part Number: 15426816
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 3022
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,80 - 2,20
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3022 0,50		2,00	75	1,05	0,05	1,50	0,10	2,20	0,10	1,90	0,10

Cable type code legend:

3022:

Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: REGULAR

