

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 3,70 - 4,07

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00		3,89	290	2,20	0,05	3,70	0,10	3,90	0,10	5,20	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

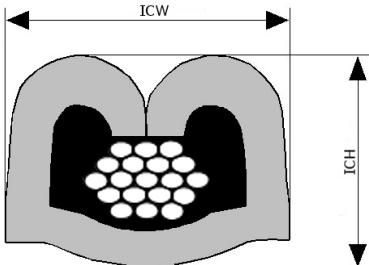

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 3,00 | 5,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 1007

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 3,45 - 4,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 3,00		3,63	240	2,00	0,05	3,60	0,10	3,70	0,10	5,20	0,10
1007 5,00		4,45	290	2,20	0,05	3,70	0,10	4,30	0,10	5,30	0,10

Cable type code legend:

1007:


Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

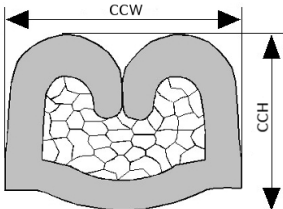

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1102

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 3,17 - 3,50

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1102 3,00		3,34	290	2,00	0,05	3,60	0,10	3,70	0,10	5,20	0,10

Cable type code legend:

1102:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: XLPE

Insul. Wall Designator: THIN

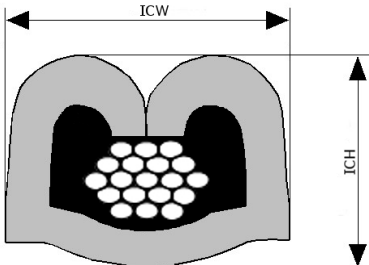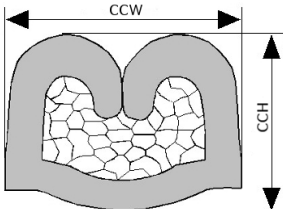

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1102

Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED

Insulation Range Φ[mm]: 3,84 - 4,09

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1102 5,00		3,97	290	2,60	0,05	3,85	0,10	3,90	0,10	5,20	0,10

Cable type code legend:

1102:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: XLPE

Insul. Wall Designator: THIN

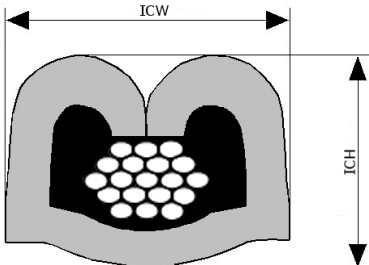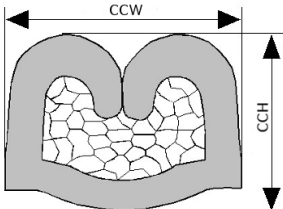

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1105

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 3,30 - 3,50

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1105 3,00		3,40	290	2,00	0,05	3,60	0,10	3,70	0,10	5,20	0,10

Cable type code legend:

1105:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: XLPE

Insul. Wall Designator: THIN

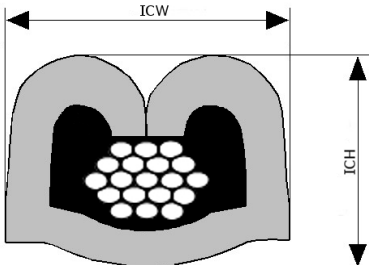

Terminal Part Number: 13753471

Surface Plating: AG

Material Thickness [mm]: 0,38

Cross Section [mm²]: 2,50 | 3,00 | 4,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 2,60 - 3,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 2,50		2,80	220	2,00	0,05	3,30	0,10	3,70	0,10	5,20	0,10
2010 3,00		3,10	300	2,00	0,05	3,10	0,10	4,00	0,10	4,80	0,10
2010 4,00		3,45	350	2,20	0,05	3,15	0,10	4,20	0,10	4,85	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

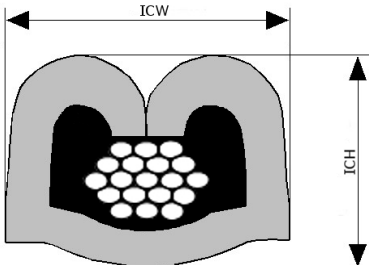

Terminal Part Number: 13753471
Surface Plating: AG
Material Thickness [mm]: 0,38
Cross Section [mm²]: 3,00 | 4,00

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2053
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,00 - 3,60
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2053 3,00		3,10	300	2,00	0,05	3,10	0,10	3,70	0,10	4,80	0,10
2053 4,00		3,50	350	2,20	0,05	3,15	0,10	3,90	0,10	4,90	0,10

Cable type code legend:

2053: PSA T2 ZH ID, PSA T3 ZH ID, PSA T4 ZH ID
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, X-POLY
Insul. Wall Designator: ID

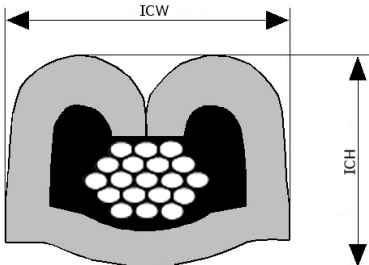

Terminal Part Number: 13753471
Surface Plating: AG
Material Thickness [mm]: 0,38
Cross Section [mm²]: 3,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2076
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,28 - 3,50
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2076 3,00		3,39	290	2,00	0,05	3,60	0,10	3,70	0,10	5,20	0,10

Cable type code legend:

2076:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: THIN

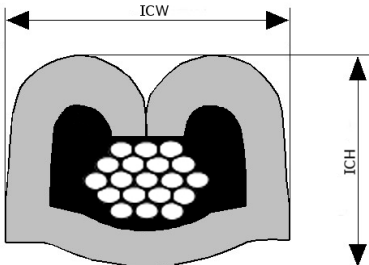

Terminal Part Number: 13753471
Surface Plating: AG
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2076
Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED
Insulation Range Φ[mm]: 3,88 - 4,10
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2076 5,00		3,99	290	2,60	0,05	3,70	0,10	3,90	0,10	5,20	0,10

Cable type code legend:

2076:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: XLPE
Insul. Wall Designator: THIN

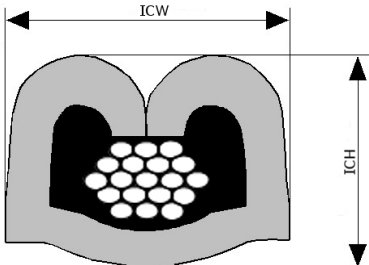

Terminal Part Number: 13753471
Surface Plating: AG
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2079
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 5,38 - 5,64
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2079 5,00		5,51	290	2,20	0,05	3,65	0,10	3,70	0,10	5,20	0,10

Cable type code legend:

2079:
Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: XLPE
Insul. Wall Designator: THIN

