

APN: 12186637
 Material: CUCRSITI SEALED // VERSION I
 Surface: SN
 Material Thickness: 0.32 mm
 Cross Section [mm²]: 0.75 | 1.00

FRAMATOME 60040031

Strip Length: 4.90 mm
 Cable Type: FLRY-B


**Uncontrolled
Copy**
 For Information only!


Isolation Range Φ [mm]: 1.70-2.10
 Seal : 10788269

Cable type	Seal APN	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.75	10788269	24x0.21	1.80	120	1.60	+ 0.05 - 0.05	2.10	+ 0.10 - 0.10	3.60	+ 0.10 - 0.10	4.20	+ 0.10 - 0.10
FLRY-B 1.00	10788269	32x0.21	2.00	160	1.70	+ 0.05 - 0.05	2.10	+ 0.10 - 0.10	3.70	+ 0.10 - 0.10	4.20	+ 0.10 - 0.10

Core: C-2.00-4.0-19
 APN 10713695
 Isolation: IS-4.50-3.0-15-A GD 66.0
 APN 10713800

Anvil: Two piece anvil:
 AC-2.00-4.25
 APN 10769935
 AI-4.50-3.6-0.6
 APN 10806990

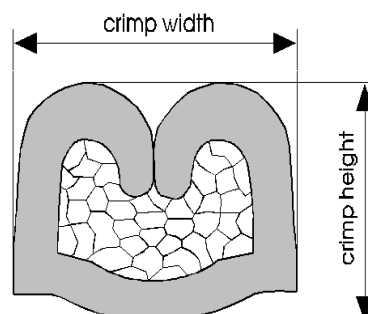


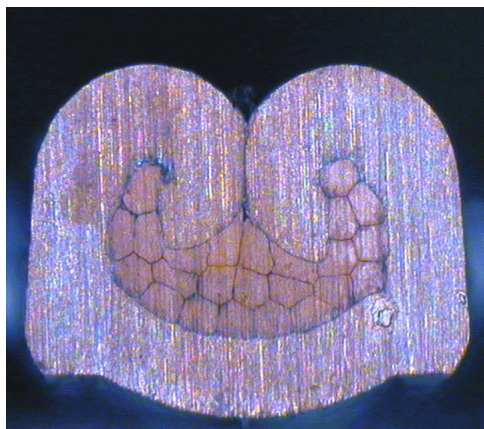

Cable:
FLRY-B 0.75mm² = 24x0.21 mm

Crimp height:
1.60 mm

Crimp width:
2.10 mm

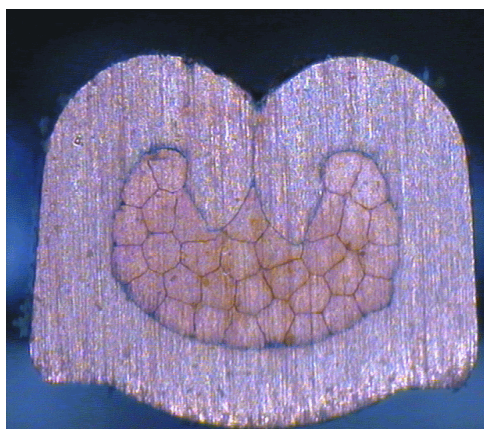

Cable:
FLRY-B 1.00mm² = 32x0.21 mm

Crimp height:
1.70 mm

Crimp width:
2.10 mm