

Terminal Part Number: 12064736
Surface Plating: SN
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,70 - 4,07
Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 15324996		3,89	300	2,25	0,05	3,75	0,10	6,30	0,20	7,20	0,20

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

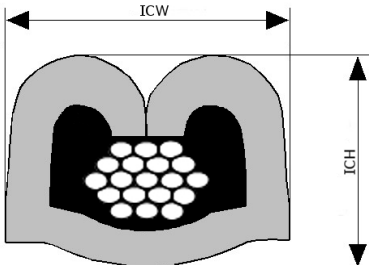

Terminal Part Number: 12064736
Surface Plating: SN
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1005
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 3,70 - 4,07
Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 5,00 / 15324996		3,89	300	2,25	0,05	3,75	0,10	6,70	0,20	7,20	0,20

Cable type code legend:

1005:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

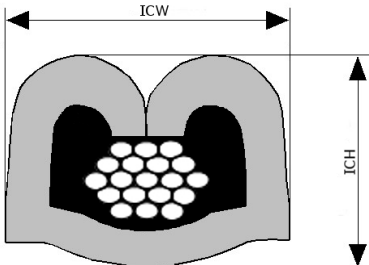

Crimp Information Sheet

DELPHI

Terminal Part Number: 12064736

Surface Plating: SN

Material Thickness [mm]: 0,38

Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1007

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 4,20 - 4,70

Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 5,00 / 15324996		4,45	300	2,25	0,05	3,75	0,10	6,50	0,20	7,30	0,20

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

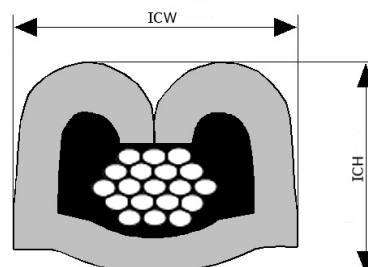

Crimp Information Sheet

DELPHI

Terminal Part Number: 12064736

Surface Plating: SN

Material Thickness [mm]: 0,38

Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1007

Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD

Insulation Range Φ [mm]: 4,20 - 4,70

Seal(s): 15324996

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 5,00 / 15324996		4,45	300	2,25	0,05	3,75	0,10	6,50	0,20	7,30	0,20

Cable type code legend:

1007:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, XLPA/PVDF, XLPE

Insul. Wall Designator: REGULAR

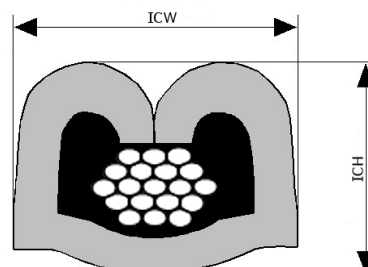

Terminal Part Number: 12064736
Surface Plating: SN
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 1009
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 4,80 - 5,33
Seal(s): 15324993

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 5,00 / 15324993		5,07	300	2,25	0,05	3,75	0,10	7,10	0,20	7,80	0,20

Cable type code legend:

1009:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

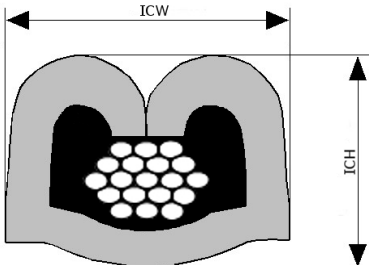

Terminal Part Number: 12064736
Surface Plating: SN
Material Thickness [mm]: 0,38
Cross Section [mm²]: 5,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1009
Crimp Process: (R) SOLDER - REFLOW [NON-SIR CIRCUIT] CORE IS DIP SOLD
Insulation Range Φ[mm]: 4,80 - 5,33
Seal(s): 15324993

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1009 5,00 / 15324993		5,07	300	2,25	0,05	3,75	0,10	7,10	0,20	7,80	0,20

Cable type code legend:

1009:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE
Insul. Wall Designator: SPECIAL

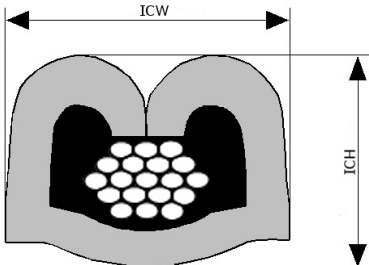

Crimp Information Sheet

DELPHI

Terminal Part Number: 12064736

Surface Plating: SN

Material Thickness [mm]: 0,38

Cross Section [mm²]: 4,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ [mm]: 3,20 - 3,70

Seal(s): 15324994

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 4,00 / 15324994		3,45	350	2,20	0,05	3,60	0,10	6,70	0,20	6,80	0,20

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B

Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

