

APN: 10774272
 Material: CUFE2P
 Surface: SN
 Material Thickness: 0.32 mm
 Cross Section [mm²]: 0.50 | 0.75 | 1.00

FRAMATOME 60110631

Strip Length: 4.00 mm
 Cable Type: FLRY-B

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 1.40-2.10
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLRY-B 0.50		16x0.21	1.50	80	1.25	+ 0.05 - 0.05	1.90	+ 0.10 - 0.10	2.30	+ 0.10 - 0.10	2.60	+ 0.10 - 0.10
FLRY-B 0.75		24x0.21	1.80	120	1.35	+ 0.05 - 0.05	1.95	+ 0.10 - 0.10	2.40	+ 0.10 - 0.10	2.60	+ 0.10 - 0.10
FLRY-B 1.00		32x0.21	2.00	160	1.45	+ 0.05 - 0.05	1.95	+ 0.10 - 0.10	2.50	+ 0.10 - 0.10	2.65	+ 0.10 - 0.10

Core:
 C-1.85-3.0-12
 APN 10713693

Isolation:
 IO-2.50-2.5-10
 APN 10713870

Anvil:

Two piece anvil:
 AC-1.85-3.25
 APN 10764127
 AI-2.50-2.8-0.4
 APN 10764145

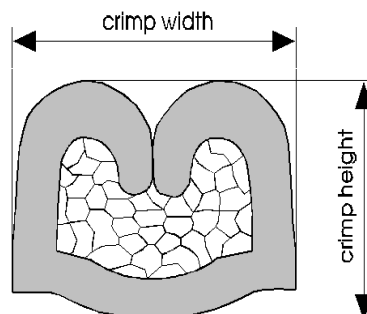




Cable:
FLRY-B 0.50mm² = 16x0.21 mm

Crimp height:
1.25 mm


Crimp width:
1.90 mm

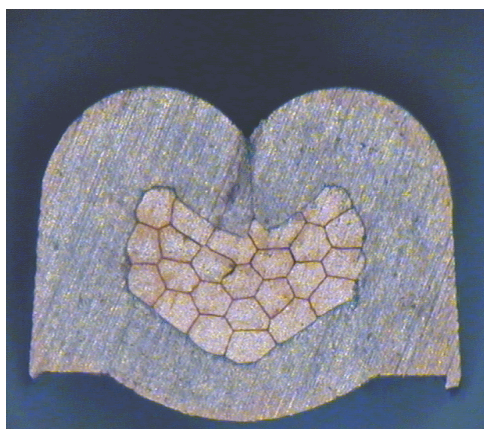

Cable:
FLRY-B 0.75mm² = 24x0.21 mm

Crimp height:
1.35 mm

Crimp width:
1.95 mm

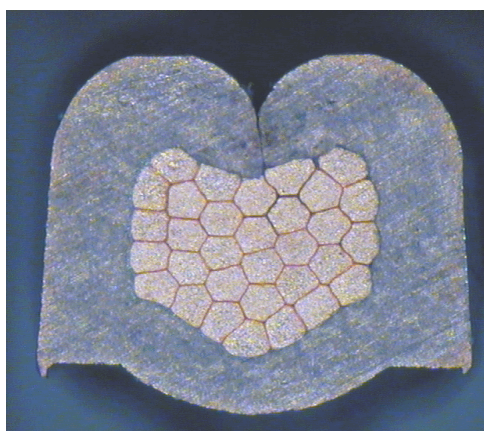

Cable:
FLRY-B 1.00mm² = 32x0.21 mm

Crimp height:
1.45 mm

Crimp width:
1.95 mm