

Terminal Part Number: 10864928  
Surface Plating: SN  
Material Thickness [mm]: -  
Cross Section [mm²]: 0,35

This document is non-contractual  
and for information only.

For more information, please  
consult your local sales office



Cable Type codes: 1021  
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
Insulation Range Φ[mm]: 0,74 - 0,80  
Seal(s): 12162575

| Cable type / seal    | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 1021 0,35 / 12162575 |             | 0,77                        | 50                    | 1,10        | 0,03               | 1,60        | 0,03               | 3,70        | 0,10               | 3,60        | 0,10               |

Cable type code legend:

1021:

Industry Designator: SAE  
Conductor Material: COPPER  
Conductor Plating: SN  
Insul. Material: NONE  
Insul. Wall Designator: NONE

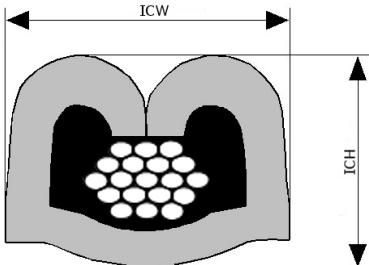

# Crimp Information Sheet

**DELPHI**

Terminal Part Number: 10864928  
Surface Plating: SN  
Material Thickness [mm]: -  
Cross Section [mm<sup>2</sup>]: 0,35 | 0,50

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 2010  
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
Insulation Range  $\Phi$ [mm]: 1,20 - 1,70  
Seal(s): 15327860 | 10752766

| Cable type / seal    | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2010 0,35 / 15327860 |             | 1,34                        | 50                    | 1,15        | 0,03               | 1,60        | 0,03               | 3,70        | 0,10               | 3,65        | 0,10               |
| 2010 0,50 / 10752766 |             | 1,50                        | 50                    | 1,20        | 0,03               | 1,60        | 0,03               | 3,70        | 0,10               | 3,60        | 0,10               |

## Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR  
(AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE,  
XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

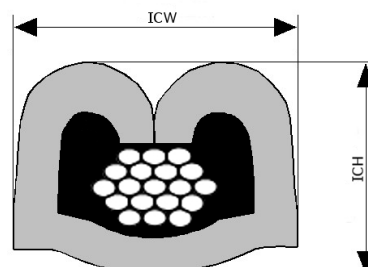

# Crimp Information Sheet

**DELPHI**

Terminal Part Number: 10864928

Surface Plating: SN

Material Thickness [mm]: -

Cross Section [mm<sup>2</sup>]: 0,35

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range  $\Phi$ [mm]: 1,10 - 1,40

Seal(s): 15404535

| Cable type / seal    | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 2017 0,35 / 15404535 |             | 1,25                        | 50                    | 1,06        | 0,03               | 1,70        | 0,03               | 3,80        | 0,10               | 3,80        | 0,10               |

## Cable type code legend:

2017: FLR41X-B, FLRY-A



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PP, PVC, XLPE

Insul. Wall Designator: THIN

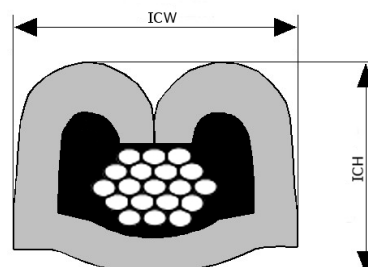

Terminal Part Number: 10864928  
Surface Plating: SN  
Material Thickness [mm]: -  
Cross Section [mm²]: 0,30

*This document is non-contractual  
and for information only.*

*For more information, please  
consult your local sales office*

Cable Type codes: 3004  
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY  
Insulation Range Φ[mm]: 1,30 - 1,50  
Seal(s): 15339967

| Cable type / seal    | Arrangement | Nominal Insul. diam<br>[mm] | Tear-out<br>force [N] | CCH<br>[mm] | Tol<br>CCH<br>[mm] | CCW<br>[mm] | Tol<br>CCW<br>[mm] | ICH<br>[mm] | Tol<br>ICH<br>[mm] | ICW<br>[mm] | Tol<br>ICW<br>[mm] |
|----------------------|-------------|-----------------------------|-----------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|-------------|--------------------|
| 3004 0,30 / 15339967 |             | 1,40                        | 50                    | 1,10        | 0,03               | 1,60        | 0,03               | 3,70        | 0,10               | 3,60        | 0,10               |

Cable type code legend:

3004: AVSS  
Industry Designator: JIS/JA  
Conductor Material: COPPER  
Conductor Plating: NONE  
Insul. Material: PVC, XLPE, X-PVC  
Insul. Wall Designator: THIN

