

Terminal Part Number: 15345367
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 1005
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,45 - 1,88
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,35		1,60	55	0,80	0,05	1,50	0,10	1,80	0,10	1,80	0,10
1005 0,50		1,74	80	1,05	0,05	1,60	0,10	1,90	0,10	2,00	0,10

Cable type code legend:

1005:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, PVDF, XLPE
Insul. Wall Designator: THIN

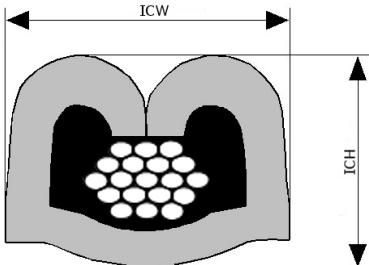

Terminal Part Number: 15345367

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 1005

Crimp Process: (V) SOLDER - VARIAC - CORE IS BARE COPPER OR TINNED

Insulation Range Φ[mm]: 1,60 - 1,88

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 0,50		1,74	80	1,05	0,05	1,60	0,10	1,90	0,10	2,00	0,10

Cable type code legend:

1005:


Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

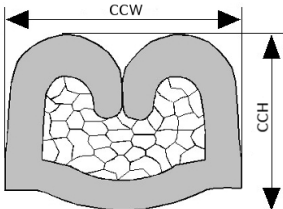

Terminal Part Number: 15345367
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 1021
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,74 - 1,02
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1021 0,35		0,77	55	0,80	0,05	1,50	0,10	1,80	0,10	1,80	0,10
1021 0,50		0,96	80	1,05	0,05	1,60	0,10	1,60	0,10	1,80	0,10

Cable type code legend:

1021:
Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

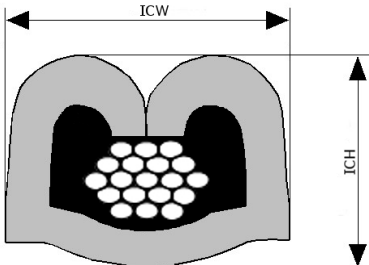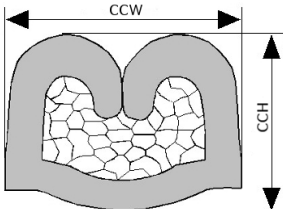

Terminal Part Number: 15345367

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2010

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,20 - 1,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,35		1,34	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2010 0,50		1,50	80	1,05	0,05	1,45	0,10	1,70	0,10	1,90	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

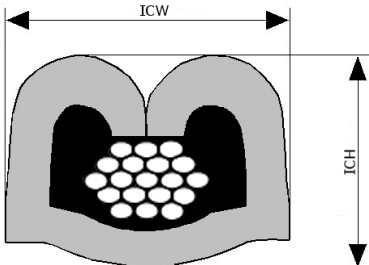

Terminal Part Number: 15345367
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 2016
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,62 - 0,67
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2016 0,35		0,65	50	0,95	0,05	1,45	0,10	1,80	0,10	1,90	0,10

Cable type code legend:

2016: DIN-CORE
Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: SN
Insul. Material: NONE
Insul. Wall Designator: NONE

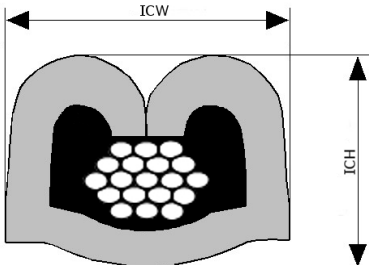

Terminal Part Number: 15345367

Surface Plating: SN

Material Thickness [mm]: 0,25

Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2017

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 1,10 - 1,70

Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2017 0,35		1,25	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2017 0,50		1,50	80	1,05	0,05	1,45	0,10	1,70	0,10	1,90	0,10

Cable type code legend:

2017: FLR41X-B, FLRY-A



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: SN

Insul. Material: PA, PP, PVC, XLPE

Insul. Wall Designator: THIN

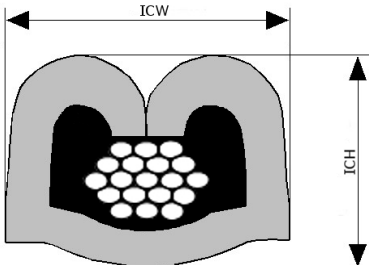

Terminal Part Number: 15345367
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,13

This document is non-contractual
and for information only.



For more information, please
consult your local sales office

Cable Type codes: 2046
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 0,81 - 0,95
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2046 0,13		0,88	40	0,85	0,05	1,45	0,10	1,20	0,10	1,70	0,10

Cable type code legend:

2046: CHFUS, FLMU142Y
Industry Designator: ISO
Conductor Material: ALLOY - DP
Conductor Plating: NONE
Insul. Material: PPE, PVC
Insul. Wall Designator: ULTRA THIN

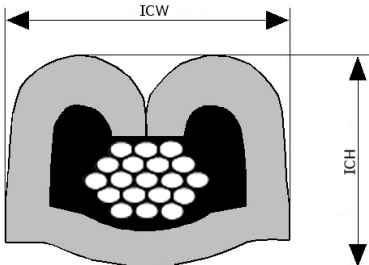

Terminal Part Number: 15345367
Surface Plating: SN
Material Thickness [mm]: 0,25
Cross Section [mm²]: 0,35 | 0,50

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 2054
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 1,25 - 1,70
Seal(s): NONE

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2054 0,35		1,33	50	0,95	0,05	1,45	0,10	1,60	0,10	1,80	0,10
2054 0,50		1,55	75	1,05	0,05	1,45	0,10	1,70	0,10	1,90	0,10

Cable type code legend:

2054: PSA T2 IR, PSA T3 IR, PSA T3 ZH IR, PSA T4 LH IR
Industry Designator: PSA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: POLYOLEFIN, PVC, X-POLY
Insul. Wall Designator: IR

