

APN: 35195965
 Material: CUNI3SI1MG
 Surface: AG
 Material Thickness: 0.15 mm
 Cross Section [mm²]: 0.13

Strip Length: 4.00 mm
 Cable Type: FLMRY-A

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 0.95-1.05
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLMRY-A 0.13		7x0.16	1.00	50	0.56	+ 0.03 - 0.03	0.93	+ 0.05 - 0.05	1.35	+ 0.10 - 0.10	1.30	+ 0.10 - 0.10

Remarks: Handcrimptool available: DPN 33328630

Core: C-0.90-3.5-6-A
 APN 10928736

Isolation: IS-1.40-1.5-6-A
 APN 10915594

Anvil: Two piece anvil:
 AC-0.90-3.75-G
 APN 10930263
 AI-1.40-2.0-0.2-A
 APN 10928735

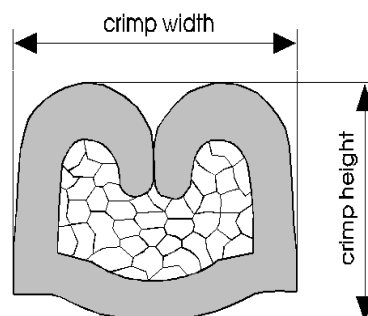

APN: 35195965



Cable:
FLMRY-A 0.13mm² = 7x0.16 mm

Crimp height:
0.56 mm

Crimp width:
0.93 mm