

APN: 35350104
 Material: CuSn4
 Surface: Sn
 Material Thickness: 0,20 mm
 Cross Section [mm²]: 0.13

Strip Length: 4.20 mm
 Cable Type: FLMRY-A

**Uncontrolled
Copy**
 For Information only!

Isolation Range Φ [mm]: 0.95-1.05
 Seal :


Cable type	Arrangement	Struct. nxd [mm]	Insul. diam [mm]	Tear-out force [N]	CCH [mm]	CCH tol. [±mm]	CCW [mm]	CCW tol. [±mm]	ICH [mm]	ICH tol. [±mm]	ICW [mm]	ICW tol. [±mm]
FLMRY-A 0.13		7x0.16	1.00	50	0.75	+ 0.03 - 0.03	1.15	+ 0.05 - 0.05	1.30	+ 0.10 - 0.10	1.50	+ 0.10 - 0.10

Core:
 C-1.10-3.5-6-A
 APN 10915395


Isolation:
 IS-1.60-2.5-8
 APN 10784535

Anvil:

Two piece anvil:
 AC-1.10-3.75-A
 APN 10915396
 AI-1.60-2.6-0.2
 APN 10805239

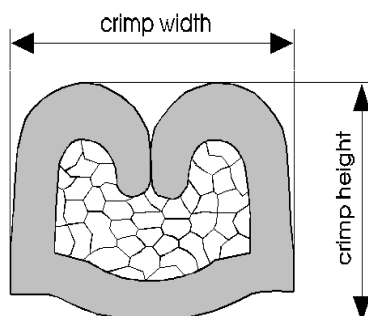

APN: 35350104

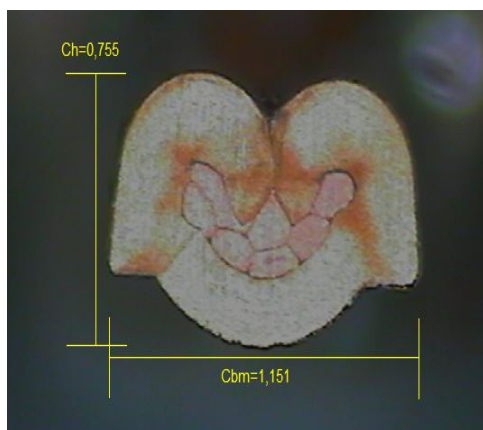

Cable:

FLMRY-A 0.13mm² = 7x0.16 mm

Crimp height:

0.75 mm

Crimp width:

1.15 mm